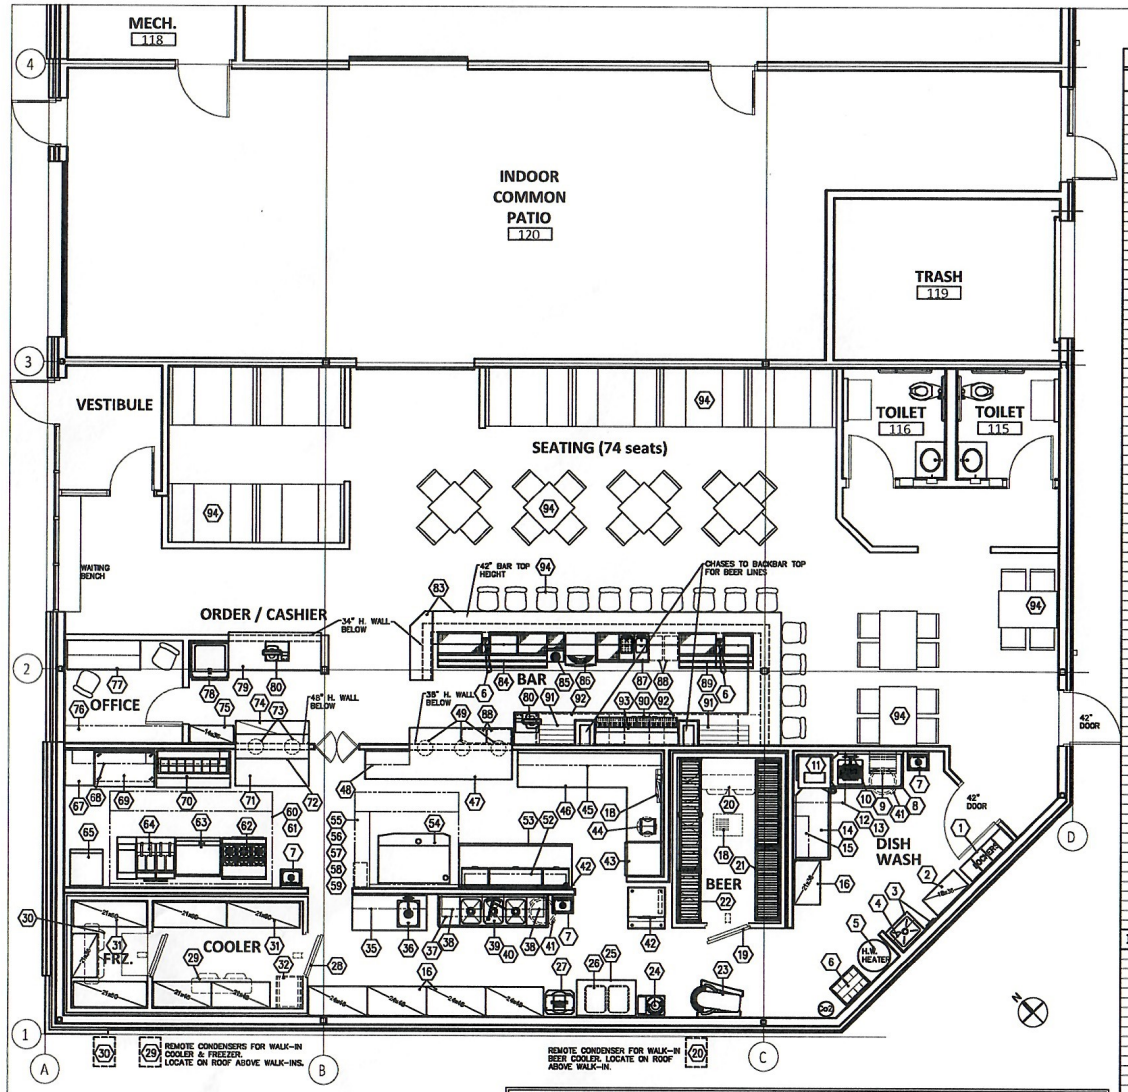

EQUIPMENT SCHEDULE (KITCHEN)

ITEM NO.	QTY.	DESCRIPTION	MFR.	MODEL	REMARKS
1	LOT	LOCKERS	BY OWNER	--	
2	1	SHELVING, CHEMICAL STORAGE	ADVANCE-TABCO	EPOXY COATED	SIZE PER PLAN. 4-SHELVES & 74" POSTS EACH.
3	1	MOP SINK, FAUCET & MOP HOLDER	BY P.C.	--	FLOOR MOUNT STYLE MOP SINK.
4	1	WALL SHELF	ADVANCE-TABCO	WS1224-16	12" X 24" ST. STL. SHELF W/ ST. STL. MOUNTING BRACKETS. MOUNT AT 60"-AFF.
5	1	HOT WATER HEATER	BY P.C.	--	--
6	1	SODA SYSTEM	SODA VENDOR	--	BAR-N-BOX RACKS, Co2, CARBONATOR, (3) SODA GUNS AT BAR, TUBING, FITTINGS, ETC.
7	3	HAND SINK, WALL MOUNTED	ADVANCE-TABCO	7-PS-56	W/ FAUCET & SIDE SPLASHES.
8	1	DISHTABLE, SOILED	ADVANCE-TABCO	DTS-930-80R	30" X 60" 14 GA. ST. STL. DISHTABLE W/ 20" X 20" X 8" SCRAP SINK & SCRAP BASKET / RACK SLIDE.
9	1	RACK SHELF, WALL MOUNTED	ADVANCE-TABCO	DT-5R-21	1-RACK CAPACITY.
10	1	PRE-RINSE SPRAY	T & S BRASS	B-0133-B08C	SPLASH MOUNTED.
11	1	DISHWASHER (CORNER STYLE)	ECOLAB	ES2000	LOW TEMP UNIT. LEASED BY OWNER.
12	1	EXHAUST HOOD, CONDENSATE	CAPTIVE-AIRE	4830WB-G	48" X 48" X 30" H. W/ 10" DIA. DUCT (600 CFM).
13	1	EXHAUST FAN, CONDENSATE	BY MECH. CONTR.	--	--
14	1	DISHTABLE, CLEAN	ADVANCE-TABCO	DTC-930-80L	30" X 60" 14 GA. ST. STL. DISHTABLE W/ UNDERSHELF.
15	1	WALL SHELF	ADVANCE-TABCO	WS1236-16	12" X 36" ST. STL. SHELF W/ ST. STL. MOUNTING BRACKETS. MOUNT AT 60"-AFF.
16	5	SHELVING, KITCHEN STORAGE	ADVANCE-TABCO	EPOXY COATED	SIZE PER PLAN. 5-SHELVES & 88" POSTS EACH.
17	--	OPEN NUMBER	--	--	--
18	1	BEER SYSTEM GLYCOL UNIT	GLASTENDER	GLC-1/3	MOUNT CONDENSERON TOP OF WALK-IN & CONTROL PANEL ON WALL ABOVE #48.
19	1	WALK-IN BAR COOLER	THERMALRITE	CUSTOM	SEE NOTE #1.
20	1	BAR COOLER REF. SYST. (CONDEN.)	BOHN-HEATCRAFT		SEE NOTE #2.
	1	BAR COOLER REF. SYST. (EVAPOR.)	BOHN-HEATCRAFT		SEE NOTE #2.
21	2	CASE BEER SHELVES	NEW AGE	1023TB & 1024TB	30" X 60" X 48" & 20" X 72" x 48" H. WELDED ALUMINUM W/ 3-SHELVES.
22	2	KEG RACK	NEW AGE	1280 & 31842TT2	(10) & (4) 1/2-BARREL KEG CAPACITY.
23	1	MIXER, 80-QT. (PIZZA)	GLOBE	SP62P	--
24	1	DOUGH ROUNDER	SOMERSET	SDR-4007	PROVIDED W/ STAND & CASTERS.
25	1	WORK TABLE	ADVANCE-TABCO	TKSS-304	30" X 48" X 36" H. W/ 14 GA. ST. STL. TOP. BACKSPLASH & OPEN BELOW FOR INGREDIENT BINS.
26	2	INGREDIENT BINS	PIPER	47-7S	(2) 150 LB. CAPACITY BINS.
27	1	DOUGH PRESS	SOMERSET	SIP-750	--
28	1	WALK-IN COOLER & FREEZER	THERMALRITE	CUSTOM	SEE NOTE #1.
29	1	COOLER REF. SYST. (CONDEN.)	BOHN-HEATCRAFT		SEE NOTE #2.
	1	COOLER REF. SYST. (EVAPOR.)	BOHN-HEATCRAFT		SEE NOTE #2.
30	1	FREEZER REF. SYST. (CONDEN.)	BOHN-HEATCRAFT		SEE NOTE #2.
	1	FREEZER REF. SYST. (EVAPOR.)	BOHN-HEATCRAFT		SEE NOTE #2.
31	7	SHELVING, COOLER & FREEZER	ADVANCE-TABCO	EPOXY COATED	SIZE PER PLAN. 4-SHELVES & 74" POSTS EACH.
32	1	PAN RACK	NEW AGE	1331	--
33	--	OPEN NUMBER	--	--	--
34	--	OPEN NUMBER	--	--	--
35	1	WALL SHELF	ADVANCE-TABCO	WS1250-16	12" X 60" ST. STL. SHELF W/ ST. STL. MOUNTING BRACKETS. MOUNT AT 60"-AFF.
36	1	PREP TABLE W/ SINK & FAUCET	ADVANCE-TABCO	KMS-118-X00R	30" X 60" X 36" H. W/ 16" X 20" X 12" DP. SINK ON RIGHT.
37	1	SHELVING, OVERHEAD	ADVANCE-TABCO	EPOXY COATED	(2) 12" X 42" SHELVES W/ ESU-18 & ESU-18 BRACKETS. MOUNT AT 72"-AFF.
38	2	WALL SHELF	ADVANCE-TABCO	WS1236-16	12" X 36" ST. STL. SHELVES W/ ST. STL. MTG. BRACKETS. MOUNT AT 60"-AFF.
39	1	3-COMPARTMENT SINK	ADVANCE-TABCO	94-3-54-18/L	(3) 16" X 20" X 14" DP. SINKS & (2) 18" DRAINBOARDS. (14 GA. S/S).
40	1	PRE-RINSE W/ ADD-ON FAUCET	T & S BRASS	B-0279	SPLASH MOUNTED. TO INCLUDE 14" SWING SPOUT FAUCET. (3/4" INLETS).
41	LOT	WASTE RECEPTACLES (KITCHEN)	BY OWNER	--	--
42	1	ICE MAKER	SCOTSMAN	CO630MA-32	600 LB. CUBER. PROVIDE W/ BB8MP-1 WATER FILTER.
	1	ICE BIN	SCOTSMAN	BS305	APPROX. 330 LB. ICE STORAGE.
43	1	REFRIGERATOR, 1-DOOR REACH-IN	TRUE	T-23-HC	W/ HALF-DOOR TRAY RACKS & CASTERS.
44	1	PIZZA PAN STAND	CHANNEL	PR-15W	W/ (15) PIZZA TRAY SLIDES.
45	2	WALL SHELVES	ADVANCE-TABCO	WS1250-16	12" X 60" ST. STL. SHELVES W/ ST. STL. MOUNTING BRACKETS. MOUNT AT 60"-AFF.
46	1	WORK TABLE, "L-SHAPED"	CUSTOM FAB.	ST. STL.	30" X 120" X 72" X 30" H. W/ 14 GA. ST. STL. TOP. BACKSPLASH & 16 GA. ST. STL. UNDERSHELVES.
47	1	COUNTER W/ PASS-THRU TOP	CUSTOM FAB.	ST. STL.	24" X 120" X 36" H. W/ 42" X 84" PASS-THRU (14 GA. S/S).
48	1	WALL SHELF	ADVANCE-TABCO	WS1236-16	12" X 36" ST. STL. SHELF W/ ST. STL. MTG. BRACKETS. MOUNT AT 60"-AFF.
49	3	HEAT LAMPS, DECORATIVE	HATCO	DLH-750-CTN	PROVIDE W/ TRACK & WALL MOUNT SWITCH.
50	--	OPEN NUMBER	--	--	--
51	--	OPEN NUMBER	--	--	--
52	1	WALL SHELF	ADVANCE-TABCO	WS1224-16	12" X 84" ST. STL. SHELF W/ ST. STL. MTG. BRACKETS. MOUNT AT 60"-AFF.
53	1	REFRIGERATOR, 93" PIZZA PREP	TRUE	TPP-AT-93-HC	W/ 18-PANS, 3-DOORS & CASTERS.
54	1	PIZZA OVEN, 3-DECK	PIZZA MASTER	PM 733 ED	ELECTRIC OVEN W/ DIGITAL DISPLAY, AUTO-TIMER & ALARM.
55	1	EXHAUST HOOD (PIZZA OVEN)	CAPTIVE-AIRE		SEE NOTE #3.
56	LOT	3" ST. STL. INSULATED PANELS	CAPTIVE-AIRE		SEE NOTE #3.
57	1	EXHAUST FAN	BY MECH. CONTR.	--	SEE NOTE #3.
58	1	HEATED MAKE-UP AIR UNIT	BY MECH. CONTR.	--	SEE NOTE #3.
59	1	FIRE SUPPRESSION SYSTEM	CAPTIVE-AIRE	TANK FS	LOCATED IN UTILITY CONTROL CABINET ON RIGHT END OF HOOD.
60	1	EXHAUST HOOD (WAH COOKING)	CAPTIVE-AIRE		SEE NOTE #3.
61	LOT	3" ST. STL. INSULATED PANELS	CAPTIVE-AIRE		SEE NOTE #3.
62	1	RANGE W/ OVEN, 6-BURNER	VULCAN	36S-6G-N	PROVIDE W/ CASTERS & GAS QUICK DISCONNECT HOSE. (NAT. GAS).
63	1	36" GRIDDLE	VULCAN	836RS	PROVIDE W/ GRIDDLE STAND (@STAND/O-36) & GAS QUICK DISCONNECT HOSE. (NAT. GAS).
64	2	FRYERS W/ FRY DUMP STATION	PITCO	SSH35R/SWB	W/ BITELEFRY, DUMP STATION, CASTERS & GAS QUICK DISCONNECT HOSE.
65	1	FREEZER, 1-DOOR REACH-IN	TRUE	T-23F-HC	W/ CASTERS.
66	--	OPEN NUMBER	--	--	--
67	1	WORK TABLE	ADVANCE-TABCO	KSS-302	30" X 24" X 36" H. W/ 14 GA. ST. STL. TOP, BACKSPLASH & UNDERSHELF.
68	2	WALL SHELF	ADVANCE-TABCO	WS1250-16	12" X 60" ST. STL. SHELVES W/ ST. STL. MTG. BRACKETS. MOUNT AT 60"-AFF.
69	1	REFRIGERATOR, 48" WORKTOP	TRUE	TWT-48-4-HC	W/ (4) DRAWERS & CASTERS.
70	1	REFRIGERATOR, 60" SAND. PREP	TRUE	TSSU-60-16-HC	W/ 16-PANS, 2-DOORS & CASTERS.
71	1	WORK TABLE	ADVANCE-TABCO	KSS-305	30" X 60" X 36" H. W/ 14 GA. ST. STL. TOP, BACKSPLASH & UNDERSHELF.
72	1	SERVING SHELF, PASS-THRU	CUSTOM FAB.	ST. STL.	30" X 60" S/S SHELF. SEMI-TO PARTIAL HEIGHT WALL BELOW.
73	2	HEAT LAMPS, DECORATIVE	HATCO	DLH-750-CTN	PROVIDE W/ TRACK & WALL MOUNT SWITCH.
74	1	SHELVING BELOW PASS-THRU	ADVANCE-TABCO	EPOXY COATED	(3) 18" X 60" SHELVES W/ (4) 34" POSTS.
75	1	SHELVING UNIT	ADVANCE-TABCO	EPOXY COATED	SIZE PER PLAN. 4-SHELVES & 74" POSTS EACH.
76	LOT	SHELVING, LIQUOR STORAGE	BY OWNER	--	--
77	LOT	OFFICE DESK, CHAIR & WALL SHELF	BY OWNER	--	--
78	1	DISPENSER, ICE-POP	BY VENDOR	VERIFY	COUNTERTOP UNIT.
79	1	COUNTER, ORDER-CASHIER	CUSTOM FAB	BY G.C.	P. LAM CABINET, HINGED DOORS, SHELVES W/ S/S LEGS & ADJ. FEET.
80	LOT	P.O.S. SYSTEM	BY OWNER	--	VERIFY REQUIREMENTS W/ OWNER. (TOUCH SCREEN MONITORS, CASH DRAWERS & PRINTERS).
81	--	OPEN NUMBER	--	--	--
82	--	OPEN NUMBER	--	--	--

EQUIPMENT SCHEDULE (BAR & DINING AREA)

83	1	BAR FIXTURE TOP & DIE WALL	CUSTOM FAB	BY G.C.	SOLID SURF. TOP, 3x8 DIE WALL W/ FRP FINISH (BARTENDER SIDE & DECORATIVE FINISH CUSTOMER SIDE).
84	1	OVERHEAD CLOUD & LIQ. STORAGE	CUSTOM FAB.	BY G.C.	ARCHITECT & G.C. TO COORDINATE W/ OWNER.
		COCKTAIL STATION (E. TO R)	--	--	--
	1	36" UNDERBAR DRAINBOARD	GLASTENDER	DBA-36	
	1	6" UNDERBAR SODA CHASE	GLASTENDER	TCA-6	
	1	24" UNDERBAR ICE CHEST	GLASTENDER	BIA-24-CP10	W/ COLD PLATE.
	1	24" UNDERBAR DRAINBOARD	GLASTENDER	DBA-24	
	1	14" UNDERBAR BLENDER STATION	GLASTENDER	DBBA-14	
	1	UNDERBAR DBL. SPEED RAILS	GLASTENDER	DSR-42/DSR-48	42" & 48" DBL. SPEED RAILS.
85	1	BLENDER	WARING	BB300	--
86	1	GLASSWASHER	ECOLAB	SF ROTARY	LEASED BY OWNER.
87		GLASS WASHING STATION (L TO R)	--	--	--
	1	18" UNDERBAR DRAINBOARD	GLASTENDER	DBB-18	
	1	12" UNDERBAR DUMP SINK	GLASTENDER	BUS-12	W/ FAUCET & REMOVABLE SCRAP BASKET.
	1	12" UNDERBAR HAND SINK	GLASTENDER	HSB-12	W/ FAUCET.
88	LOT	WASTE RECEPTACLES (BAR)	BY OWNER	--	--
89		COCKTAIL STATION (E. TO R)	--	--	--
	1	30" UNDERBAR DRAINBOARD	GLASTENDER	DBA-30	
	1	6" UNDERBAR SODA CHASE	GLASTENDER	TCA-6	
	1	24" UNDERBAR ICE CHEST	GLASTENDER	BIA-24-CP10	W/ COLD PLATE.
	1	60" UNDERBAR DBL. SPEED RAIL	GLASTENDER	DSR-60	
90	1	BACKBAR TOP & CABINET BASES	CUSTOM FAB	BY G.C.	SOLID SURF. TOP, P. LAM. CABINET BASE & S/S LEGS. G.C. TO COORDINATE W/ OWNER.
91	2	LIQUOR DISPLAY STEPS	CUSTOM FAB	BY G.C.	(4) P. LAM. STEPS (BLACK).
92	1	72" REFRIGERATOR, BACKBAR	GLASTENDER	CFD72-L	UNFINISHED TOP, BLACK VINYL SIDES, GLASS/BLACK VINYL DOORS, 2" CASTERS & COMPRESSOR ON LEFT.
	1	72" REFRIGERATOR, BACKBAR (KEGS)	GLASTENDER	CFD72-R	UNFINISHED TOP, BLACK VINYL SIDES, BLACK VINYL DOORS, 2" CASTERS, COMP. ON RIGHT & KEG RACK.
93	1	BEER TOWER, 16-TAP	MICROMATIC	16-TAPS	8" DIA. S/S TUBING W/ END FLANGES SECURED TO SIDE WALLS. BEER LINES FED DOWN THRU SIDE CHASES.
	2	S/S DRIP PANS	MICROMATIC	DP-SSRD-33	(2) 5" D. X 24" L. TOP MOUNT S/S DRIP PANS W/ 1/2" DRAINS.
94	LOT	FURNITURE PACKAGE	BY OWNER	--	BOOTHS, TABLES, CHAIRS & BAR STOOLS.

PLAN & SCHEDULE NOTES:

1. WALK-IN BEER COOLER (7'-9" x 12'-0" x 9'-0" O.A. HEIGHT) – FLOORLESS.
   WALK-IN COOLER & FREEZER –PER PLAN (8'-0" x 16'-5" x 9'-0" O.A. HEIGHT) W/ S/S FLOOR & RAMP IN FREEZER.
   COOLER INTERIOR 7'-4" x 10'-2" & FREEZER INTERIOR 7'-4" x 5'-2".
   ACRYLUME-EMBOSSED WALLS & CEILINGS, 34" DOORS, VIEWPORT IN ALL DOORS & DIAMOND TREAD WAINSCOTE (INT./EXT.) ON ALL DOORS, LED LIGHTING & 38" H. WAINSCOTE ON EXPOSED EXTERIOR. (4) WALL TRIM STRIPS & CEILING CLOSURE PANELS.
2. COOLER & FREEZER REFRIGERATION SYSTEMS – REMOTE CONDENSERS ARE TO BE MOUNTED ON ROOF ABOVE WALK-INS. COORDINATE LOCATION W/ G.C., K.E.C. TO PROVIDE BLOCKING FOR CONDENSERS & RUN REFRIGERATION LINES TO EVAPORATOR COILS INSIDE WALK-IN. G.C. IS TO PROVIDE ROOF PENETRATION FOR REFRIGERATION LINES.
   P.C. TO PROVIDE COPPER DRAIN LINES FOR COOLERS & FREEZER EVAP. COILS AND EXTEND COIL DRAINLINES THRU WALK-IN WALL PANEL TO FUNNEL FLOOR DRAINS. DRAIN LINES MUST HAVE P-TRAP PRIOR TO EMPTYING INTO DRAIN.
   FREEZER DRAIN LINE IS WRAPPED W/ HEAT TAPE (BY E.C.). E.C. TO PROVIDE SERVICE TO REMOTE CONDENSERS ON ROOF & PROVIDE SERVICE FROM ABOVE WALK-IN FOR EVAPORATOR COIL. ROUTE THRU WALK-IN CEILINGS TO COILS.
   E.C. TO PROVIDE RECEPTACLE IN FREEZER, BEHIND COIL AT CEILING FOR DRAIN LINE HEAT TAPE PLUG-IN (120/1, 12A.).
3. EXHAUST HOODS – CONDENSATE HOOD 48" X 48" X 30" H. 10" DIA RISER, 600 CFM AT –0.030" S.P.
   PIZZA OVEN HOOD 5'-0" X 5'-0" X 30" H. W/ PERFORATED SUPPLY AIR PLENUM ALONG FRONT, UTILITY CABINET AT RIGHT & 3" ST. STL. INSULATED WALL PANELS AT REAR (6"-AFFF. TO 80"-AFF.), UTILITY CABINET IS FOR (2) HOODS, EXH. FAN, MUA CONTROLS & FIRE PROTECTION SYSTEM. THE CONTROLS ARE INCLUDED W/ EXHAUST HOOD ELECTRICAL PACKAGE.
   MAIN COOKING HOOD 4'-6" X 11'-0" X 30" H. W/ PERFORATED SUPPLY AIR PLENUM ALONG FRONT & 3" ST. STL. INSULATED WALL PANELS AT REAR (6"-AFFF. TO 80"-AFF.).
   PIZZA OVEN HOOD EXHAUST – XX" DIA. RISERS (XXXX TOTAL EXHAUST CFM).
   MAIN COOKING HOOD EXHAUST – (X) XX" DIA. RISERS (XXXX TOTAL EXHAUST CFM).
   MAKE-UP AIR – (X) XX" X XX" RISERS (XXXX TOTAL SUPPLY CFM).
   (1) EXHAUST FAN FOR (2) HOODS, MAKE-UP AIR UNIT & ALL DUCTWORK IS PROVIDED & INSTALLED BY MECH. CONTR.

PROGRESS SET
4-21-25

DRAWING SHEET INDEX

FS-1 KITCHEN–BAR EQUIPMENT PLAN & SCHEDULE
FS-2 KITCHEN–BAR EQUIPMENT PLUMBING PLAN & SCHEDULE
FS-3 KITCHEN–BAR EQUIPMENT ELECTRICAL PLAN & SCHEDULE
~~FS-4 KITCHEN–BAR EQUIPMENT HOOD SYS. PLAN~~
~~FS-5 KITCHEN–BAR EQUIPMENT 2-SINK/DISH SYS.~~
~~FS-6 KITCHEN–BAR EQUIPMENT EXHAUST~~

REVISIONS
DATE:
DATE:
DATE:
DATE:
DATE:
DATE:
DATE:

THIS DRAWING AND ALL REPRODUCTION THEREOF ARE THE PROPERTY OF R.L. MATHER AND MAY NOT BE REPRODUCED OR DISTRIBUTED IN WHOLE OR IN PART WITHOUT THE EXPRESSED WRITTEN CONSENT OF THE DESIGNER

R. L. MATHER
KITCHEN, DINING & BAR
LAY-OUT & DESIGN
(763) 572-3900
10000 CROSSROAD BLVD., PRIOR LAKE, MN
(763) 572-3900
bob@rlmather.com

TITLE
1324 W. 7TH. STREET
ST. PAUL, MN
KITCHEN – BAR EQUIPMENT PLAN & SCHEDULE

JOB NAME
1324 W. 7TH. STREET
JOB NO.
DATE
4-21-25
SCALE
1/4"=1'-0"
DESIGN DRAWN
R.L.M.
PROJECT MANAGER
SHEET
FS-1