

NOTE:

**Boring #5 was not drilled due to
underground utility conflicts**



AMERICAN
ENGINEERING
TESTING, INC.

SUBSURFACE BORING LOG

AET JOB NO: **05-02680**

LOG OF BORING NO. **6 (p. 1 of 1)**

PROJECT: **Proposed Addition to Cossetta's Restaurant; St. Paul, MN**

DEPTH IN FEET	SURFACE ELEVATION: 84.4 MATERIAL DESCRIPTION	GEOLOGY	N	MC	SAMPLE TYPE	REC IN.	FIELD & LABORATORY TESTS				
							WC	DEN	LL	PL	%-#200
1	3" Bituminous pavement FILL, mixture of sand and clayey sand, a little gravel, brown	FILL	15	M	SS	4					
2			11	M	SS	6					
3											
4											
5	FILL, mostly gravelly silty sand, pieces of brick, brown		15	M	SS	4					
6											
7											
8			8	M	SS	4					
9											
10	FILL, mostly silty sand with gravel, pieces of brick, metal, cinders and clinkers		57	M	SS	12					
11	REFUSAL TO HSA AT 11.1'										

DEPTH: DRILLING METHOD		WATER LEVEL MEASUREMENTS						NOTE: REFER TO THE ATTACHED SHEETS FOR AN EXPLANATION OF TERMINOLOGY ON THIS LOG	
		DATE	TIME	SAMPLED DEPTH	CASING DEPTH	CAVE-IN DEPTH	DRILLING FLUID LEVEL		WATER LEVEL
0-11.1'	3.25" HSA	8/8/06	7:40						None
BORING COMPLETED: 8/8/06									
DR: SB LG: TM Rig: 1C									



AMERICAN
ENGINEERING
TESTING, INC.

SUBSURFACE BORING LOG

AET JOB NO: <u>05-02680</u>		LOG OF BORING NO. <u>7 (p. 1 of 1)</u>										
PROJECT: <u>Proposed Addition to Cossetta's Restaurant; St. Paul, MN</u>												
DEPTH IN FEET	SURFACE ELEVATION: <u>83.6</u> MATERIAL DESCRIPTION	GEOLOGY	N	MC	SAMPLE TYPE	REC IN.	FIELD & LABORATORY TESTS					
							WC	DEN	LL	PL	4-#200	
1	2.75" Bituminous pavement	FILL		M	☒ SU	6						
	☒ SS											
	FILL, mostly gravel with silt and sand, pieces of limestone and concrete, brown	PLATTEVILLE FORMATION										
	WEATHERED DOLOSTONE, light brown, moist, very dense, Textural Classification: Silty sand with gravel											
	REFUSAL TO HSA AT 1 1/4'											
DEPTH: DRILLING METHOD		WATER LEVEL MEASUREMENTS						NOTE: REFER TO THE ATTACHED SHEETS FOR AN EXPLANATION OF TERMINOLOGY ON THIS LOG				
0-1 1/2' 3.25" HSA		DATE	TIME	SAMPLED DEPTH	CASING DEPTH	CAVE-IN DEPTH	DRILLING FLUID LEVEL					WATER LEVEL
		8/8/06										None
BORING COMPLETED: 8/8/06												
DR: SB LG: TM Rig: 1C												

EXPLORATION/CLASSIFICATION METHODS

SAMPLING METHODS

Split-Spoon Samples (SS) - Calibrated to N_{60} Values

Standard penetration (split-spoon) samples were collected in general accordance with ASTM:D1586 with one primary modification. The ASTM test method consists of driving a 2" O.D. split-barrel sampler into the in-situ soil with a 140-pound hammer dropped from a height of 30". The sampler is driven a total of 18" into the soil. After an initial set of 6", the number of hammer blows to drive the sampler the final 12" is known as the standard penetration resistance or N-value. Our method uses a modified hammer weight, which is determined by measuring the system energy using a Pile Driving Analyzer (PDA) and an instrumented rod.

In the past, standard penetration N-value tests were performed using a rope and cathead for the lift and drop system. The energy transferred to the split-spoon sampler was typically limited to about 60% of its potential energy due to the friction inherent in this system. This converted energy then provides what is known as an N_{60} blow count.

Most of today's drill rigs incorporate an automatic hammer lift and drop system, which has higher energy efficiency and subsequently results in lower N-values than the traditional N_{60} values. By using the PDA energy measurement equipment, we are able to determine actual energy generated by the drop hammer. With the various hammer systems available, we have found highly variable energies ranging from 55% to over 100%. Therefore, the intent of AET's hammer calibrations is to vary the hammer weight such that hammer energies lie within about 60% to 65% of the theoretical energy of a 140-pound weight falling 30". The current ASTM procedure acknowledges the wide variation in N-values, stating that N-values of 100% or more have been observed.

Although we have not yet determined the statistical measurement uncertainty of our calibrated method to date, we can state that the accuracy deviation of the N-values using this method are significantly better than the standard ASTM Method.

Disturbed Samples (DS)/Spin-up Samples (SU)

Sample types described as "DS" or "SU" on the boring logs are disturbed samples, which are taken from the flights of the auger. Because the auger disturbs the samples, possible soil layering and contact depths should be considered approximate.

Sampling Limitations

Unless actually observed in a sample, contacts between soil layers are estimated based on the spacing of samples and the action of drilling tools. Cobbles, boulders, and other large objects generally cannot be recovered from test borings, and they may be present in the ground even if they are not noted on the boring logs.

CLASSIFICATION METHODS

Soil classifications shown on the boring logs are based on the Unified Soil Classification (USC) system. The USC system is described in ASTM:D2487 and D2488. Where laboratory classification tests (sieve analysis or Atterberg Limits) have been performed, accurate classifications per ASTM:D2487 are possible. Otherwise, soil classifications shown on the boring logs are visual-manual judgments. Charts are attached which provide information on the USC system, the descriptive terminology, and the symbols used on the boring logs.

The boring logs include descriptions of apparent geology. The geologic depositional origin of each soil layer is interpreted primarily by observation of the soil samples, which can be limited. Observations of the surrounding topography, vegetation, and development can sometimes aid this judgment.

WATER LEVEL MEASUREMENTS

The ground water level measurements are shown at the bottom of the boring logs. The following information appears under "Water Level Measurements" on the logs:

- Date and Time of measurement
- Sampled Depth: lowest depth of soil sampling at the time of measurement
- Casing Depth: depth to bottom of casing or hollow-stem auger at time of measurement
- Cave-in Depth: depth at which measuring tape stops in the borehole
- Water Level: depth in the borehole where free water is encountered
- Drilling Fluid Level: same as Water Level, except that the liquid in the borehole is drilling fluid

The true location of the water table at the boring locations may be different than the water levels measured in the boreholes. This is possible because there are several factors that can affect the water level measurements in the borehole. Some of these factors include: permeability of each soil layer in profile, presence of perched water, amount of time between water level readings, presence of drilling fluid, weather conditions, and use of borehole casing.

SAMPLE STORAGE

Unless notified to do otherwise, we routinely retain representative samples of the soils recovered from the borings for a period of 30 days.

BORING LOG NOTES

DRILLING AND SAMPLING SYMBOLS

Symbol	Definition
B,H,N:	Size of flush-joint casing
CA:	Crew Assistant (initials)
CAS:	Pipe casing, number indicates nominal diameter in inches
CC:	Crew Chief (initials)
COT:	Clean-out tube
DC:	Drive casing; number indicates diameter in inches
DM:	Drilling mud or bentonite slurry
DR:	Driller (initials)
DS:	Disturbed sample from auger flights
FA:	Flight auger; number indicates outside diameter in inches
HA:	Hand auger; number indicates outside diameter
HSA:	Hollow stem auger; number indicates inside diameter in inches
LG:	Field logger (initials)
MC:	Column used to describe moisture condition of samples and for the ground water level symbols
N (BPF):	Standard penetration resistance (N-value) in blows per foot (see notes)
NQ:	NQ wireline core barrel
PQ:	PQ wireline core barrel
RD:	Rotary drilling with fluid and roller or drag bit
REC:	In split-spoon (see notes) and thin-walled tube sampling, the recovered length (in inches) of sample. In rock coring, the length of core recovered (expressed as percent of the total core run). Zero indicates no sample recovered.
REV:	Revert drilling fluid
SS:	Standard split-spoon sampler (steel; 1 3/8" is inside diameter; 2" outside diameter); unless indicated otherwise
SU:	Spin-up sample from hollow stem auger
TW:	Thin-walled tube; number indicates inside diameter in inches
WASH:	Sample of material obtained by screening returning rotary drilling fluid or by which has collected inside the borehole after "falling" through drilling fluid
WH:	Sampler advanced by static weight of drill rod and hammer
WR:	Sampler advanced by static weight of drill rod
94mm:	94 millimeter wireline core barrel
▼:	Water level directly measured in boring
▽:	Estimated water level based solely on sample appearance

TEST SYMBOLS

Symbol	Definition
CONS:	One-dimensional consolidation test
DEN:	Dry density, pcf
DST:	Direct shear test
E:	Pressuremeter Modulus, tsf
HYD:	Hydrometer analysis
LL:	Liquid Limit, %
LP:	Pressuremeter Limit Pressure, tsf
OC:	Organic Content, %
PERM:	Coefficient of permeability (K) test; F - Field; L - Laboratory
PL:	Plastic Limit, %
q _p :	Pocket Penetrometer strength, tsf (<u>approximate</u>)
q _c :	Static cone bearing pressure, tsf
q _u :	Unconfined compressive strength, psf
R:	Electrical Resistivity, ohm-cms
RQD:	Rock Quality Designation of Rock Core, in percent (aggregate length of core pieces 4" or more in length as a percent of total core run)
SA:	Sieve analysis
TRX:	Triaxial compression test
VSR:	Vane shear strength, remoulded (field), psf
VSU:	Vane shear strength, undisturbed (field), psf
WC:	Water content, as percent of dry weight
%-200:	Percent of material finer than #200 sieve

STANDARD PENETRATION TEST NOTES

(Calibrated Hammer Weight)

The standard penetration test consists of driving a split-spoon sampler with a drop hammer (calibrated weight varies to provide N₆₀ values) and counting the number of blows applied in each of three 6" increments of penetration. If the sampler is driven less than 18" (usually in highly resistant material), permitted in ASTM:D1586, the blows for each complete 6" increment and for each partial increment is on the boring log. For partial increments, the number of blows is shown to the nearest 0.1' below the slash.

The length of sample recovered, as shown on the "REC" column, may be greater than the distance indicated in the N column. The disparity is because the N-value is recorded below the initial 6" set (unless partial penetration defined in ASTM:D1586 is encountered) whereas the length of sample recovered is for the entire sampler drive (which may even extend more than 18").

UNIFIED SOIL CLASSIFICATION SYSTEM ASTM Designations: D 2487, D2488

AMERICAN
ENGINEERING
TESTING, INC.



Notes

- ^ABased on the material passing the 3-in (75-mm) sieve.
^BIf field sample contained cobbles or boulders, or both, add "with cobbles or boulders, or both" to group name.
^CGravels with 5 to 12% fines require dual symbols:
 GW-GM well-graded gravel with silt
 GW-GC well-graded gravel with clay
 GP-GM poorly graded gravel with silt
 GP-GC poorly graded gravel with clay
^DSands with 5 to 12% fines require dual symbols:
 SW-SM well-graded sand with silt
 SW-SC well-graded sand with clay
 SP-SM poorly graded sand with silt
 SP-SC poorly graded sand with clay

$$(D_{30})^2$$

$$D_{10} \times D_{60}$$



- ^E $C_u = D_{60}/D_{10}$, $C_c = \frac{(D_{30})^2}{D_{10} \times D_{60}}$
^FIf soil contains $\geq 15\%$ sand, add "with sand" to group name.
^GIf fines classify as CL-ML, use dual symbol GC-GM, or SC-SM.
^HIf fines are organic, add "with organic fines" to group name.
^IIf soil contains $\geq 15\%$ gravel, add "with gravel" to group name.
^JIf Atterberg limits plot is hatched area, soils is a CL-ML silty clay.
^KIf soil contains 15 to 29% plus No. 200 add "with sand" or "with gravel", whichever is predominant.
^LIf soil contains $\geq 30\%$ plus No. 200, predominantly sand, add "sandy" to group name.
^MIf soil contains $\geq 30\%$ plus No. 200, predominantly gravel, add "gravelly" to group name.
^N $PI \geq 4$ and plots on or above "A" line.
^O $PI < 4$ or plots below "A" line.
^P PI plots on or above "A" line.
^Q PI plots below "A" line.
^RFiber Content description shown below.

Criteria for Assigning Group Symbols and Group Names Using Laboratory Tests^A

Soil Classification

Group Symbol Group Name^B

Coarse-Grained Soils More than 50% retained on No. 200 sieve	Gravels More than 50% coarse fraction retained on No. 4 sieve	Clean Gravels Less than 5% fines ^C	$C_u \geq 4$ and $1 \leq C_c \leq 3^E$	GW	Well graded gravel ^F	
			$C_u < 4$ and/or $1 > C_c > 3^E$	GP	Poorly graded gravel ^F	
		Gravels with Fines more than 12% fines ^C	Fines classify as ML or MH	GM	Silty gravel ^{F,G,H}	
			Fines classify as CL or CH	GC	Clayey gravel ^{F,G,H}	
	Sands 50% or more of coarse fraction passes No. 4 sieve	Clean Sands Less than 5% fines ^D	$C_u \geq 6$ and $1 \leq C_c \leq 3^E$	SW	Well-graded sand ^I	
			$C_u < 6$ and $1 > C_c > 3^E$	SP	Poorly-graded sand ^I	
Sands with Fines more than 12% fines ^D		Fines classify as ML or MH	SM	Silty sand ^{G,H,I}		
		Fines classify as CL or CH	SC	Clayey sand ^{G,H,I}		
Fine-Grained Soils 50% or more passes the No. 200 sieve (see Plasticity Chart below)	Silts and Clays Liquid limit less than 50	inorganic	PI > 7 and plots on or above "A" line ^J	CL	Lean clay ^{K,L,M}	
			PI < 4 or plots below "A" line ^J	ML	Silt ^{K,L,M}	
		organic	Liquid limit—oven dried < 0.75 Liquid limit – not dried	OL	Organic clay ^{K,L,M,N} Organic silt ^{K,L,M,O}	
		Silts and Clays Liquid limit 50 or more	inorganic	PI plots on or above "A" line	CH	Fat clay ^{K,L,M}
				PI plots below "A" line	MH	Elastic silt ^{K,L,M}
	organic		Liquid limit—oven dried < 0.75 Liquid limit – not dried	OH	Organic clay ^{K,L,M,P} Organic silt ^{K,L,M,Q}	
	Highly organic		Primarily organic matter, dark in color, and organic in odor	PT	Peat ^R	

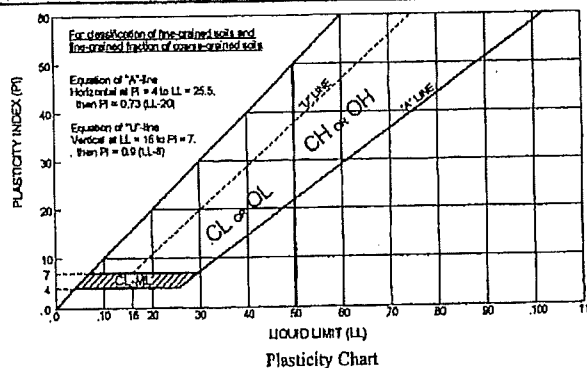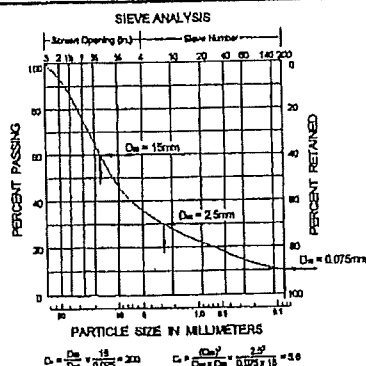


ADDITIONAL TERMINOLOGY NOTES USED BY AET FOR SOIL IDENTIFICATION AND DESCRIPTION

Grain Size		Gravel Percentages		Consistency of Plastic Soils		Relative Density of Non-Plastic Soils	
Term	Particle Size	Term	Percent	Term	N-Value, BPF	Term	N-Value, BPF
Boulders	Over 12"	A Little Gravel	3% - 14%	Very Soft	less than 2	Very Loose	0 - 4
Cobbles	3" to 12"	With Gravel	15% - 29%	Soft	2 - 4	Loose	5 - 10
Gravel	#4 sieve to 3"	Gravelly	30% - 50%	Firm	5 - 8	Medium Dense	11 - 30
Sand	#200 to #4 sieve			Stiff	9 - 15	Dense	31 - 50
Fines (silt & clay)	Pass #200 sieve			Very Stiff	16 - 30	Very Dense	Greater than 50
Moisture/Frost Condition		Layering Notes		Fiber Content of Peat		Organic/Roots Description (if no lab tests)	
(MC Column)		Laminations: Layers less than 1/2" thick of differing material or color.		Fiber Content (Visual Estimate)		Soils are described as <i>organic</i> , if soil is not peat and is judged to have sufficient organic fines content to influence the soil properties. <i>Slightly organic</i> used for borderline cases.	
D (Dry):	Absence of moisture, dusty, dry to touch.	Lenses: Pockets or layers greater than 1/2" thick of differing material or color.		Term		With roots: Judged to have sufficient quantity of roots to influence the soil properties. Trace roots: Small roots present, but not judged to be in sufficient quantity to significantly affect soil properties.	
M (Moist):	Damp, although free water not visible. Soil may still have a high water content (over "optimum").			Fibric Peat:	Greater than 67%		
W (Wet/ Waterbearing):	Free water visible intended to describe non-plastic soils. Waterbearing usually relates to sands and sand with silt.			Hemic Peat:	33 - 67%		
F (Frozen):	Soil frozen			Sapric Peat:	Less than 33%		

Cossetta's Added Geoprobes
AET Project 29-00665
8/8/2011

Boring	Depth to Rock in feet
1	6½
2	8
3	8
4	3
5	5
6	3
7	2
8	8

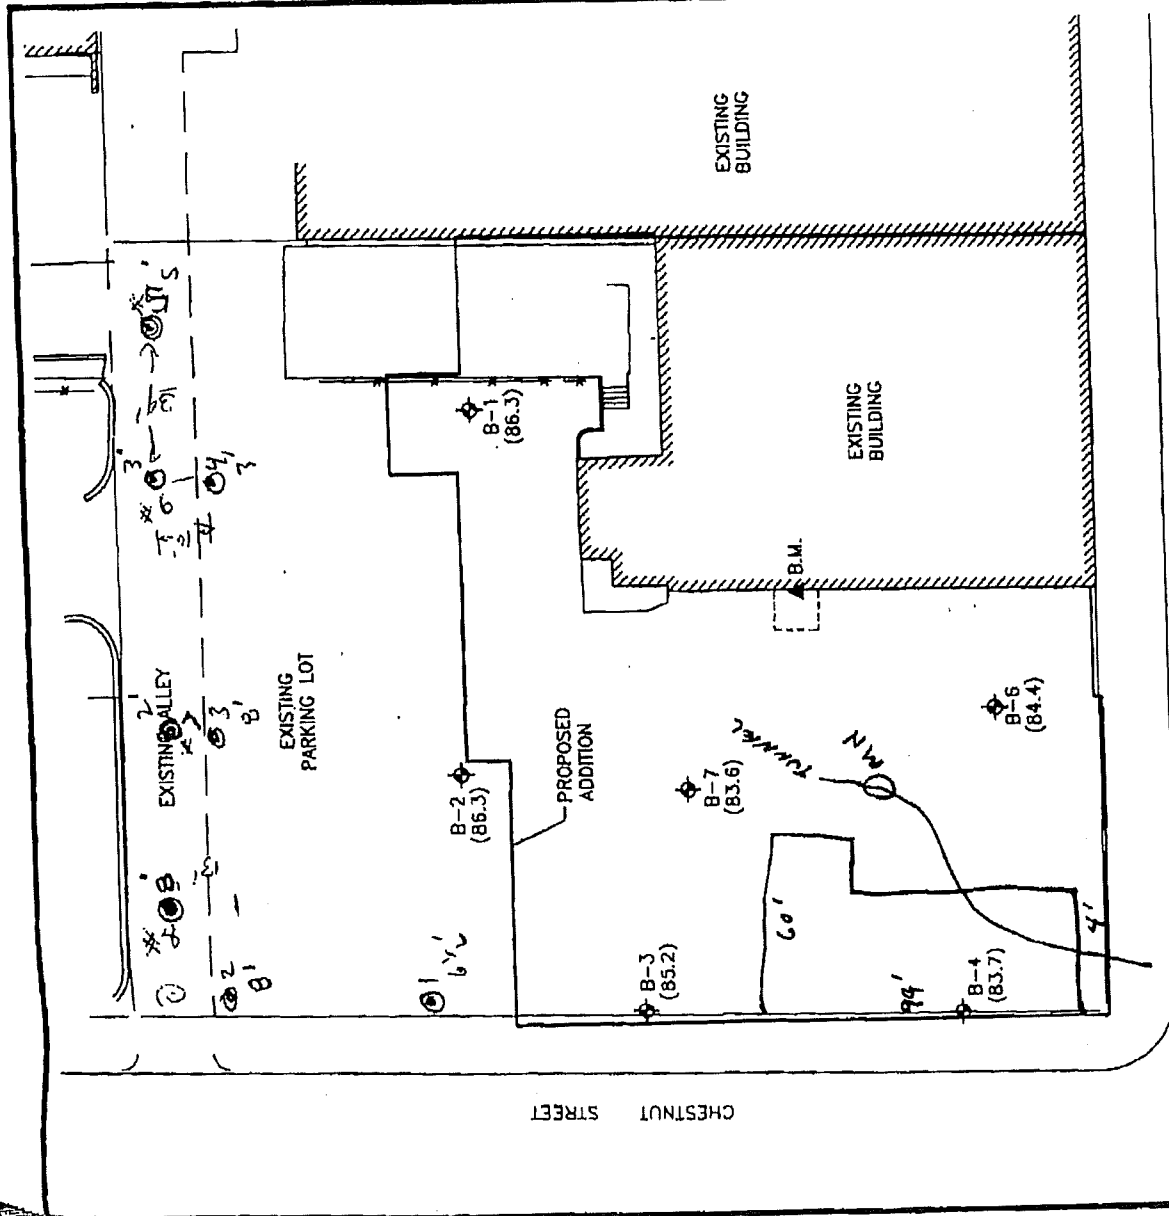

WEST 7TH STREET

- LEGEND**
- ⊕ = APPROXIMATE SOIL BORING LOCATION (AND GROUND SURFACE ELEVATION)
 - ▲ = BENCHMARK: FIRST FLOOR SLAB OF EXISTING BUILDING

29-60665

BORING ID:

243

Casotais

DATE:

8-17

PROJECT: U-28 (A)							
DEPTH (FEET)	Description of Soil	GEOLOGICAL SYMBOL	#	DEPTH	MC TYPE	REC TIME	PPM OTHER
	brown gravel	Ft		0-9	M MC	3	
2½'	Fil, mainly silty sand & gravel, some brick frags. & slag at bottom to black			4-8	M MC	3	
5'	Fil, mainly red bricks, gravel			8-9	M MC	¼	
8'	limestone - brown	B/C					
9'	disturbed						

OF

8990-52

B#4

Assets

8-8-11

[illegible]

100

59909-52

五世

Czsetz's

88-11

[illegible]

FO

29-60665

94

Cassell's

11-8-8

[illegible]

OF

29-00655

乙丑

Cassettes

6-8-11

[illegible]

OF

878

assets

8511

[illegible]