

Date: March 12, 2017
File #: 07 - 227865
Folder Name: 1422 PASCAL ST N
PIN: 222923310129



Date: March 12, 2017
File #: 07 - 227865
Folder Name: 1422 PASCAL ST N
PIN: 222923310129



Date: March 12, 2017
File #: 07 - 227865
Folder Name: 1422 PASCAL ST N
PIN: 222923310129



Date: March 12, 2017
File #: 07 - 227865
Folder Name: 1422 PASCAL ST N
PIN: 222923310129



Date: March 12, 2017
File #: 07 - 227865
Folder Name: 1422 PASCAL ST N
PIN: 222923310129

- Reduce performance, resulting in longer drying times and increased energy usage.

The Vent system chart provides venting requirements that will help to achieve the best drying performance.

Vent system chart

NOTE: Side exhaust installations add a 90° turn inside the dryer. To determine maximum exhaust length, add one 90° turn to the chart.

Number of 90° turns or elbows	Type of Vent	Box or Louvered hoods	Angled hoods
0	Rigid metal	37 ft (11.3 m)	35 ft (10.7 m)
1	Rigid metal	32 ft (9.7 m)	27 ft (8.2 m)
2	Rigid metal	24 ft (7.3 m)	19 ft (5.8 m)


Install Vent System

1. Install exhaust hood. Use caulking compound to seal exterior wall opening around exhaust hood.
2. Connect vent to exhaust hood. Vent must fit inside exhaust hood. Secure vent to exhaust hood with 4" (102 mm) clamp.
3. Run vent to dryer location. Use the straightest path possible. See "Determine vent path" in "Plan Vent System." Avoid 90° turns. Use clamps to seal all joints. Do not use duct tape, screws, or other fastening devices that extend into the interior of the vent to secure the vent, because they can catch lint.

Level Washer/Dryer

Properly leveling your washer/dryer avoids excessive noise and vibration.

1. Check the levelness of the washer/dryer by placing a level on the top edge of the washer, first side to side, then front to back.

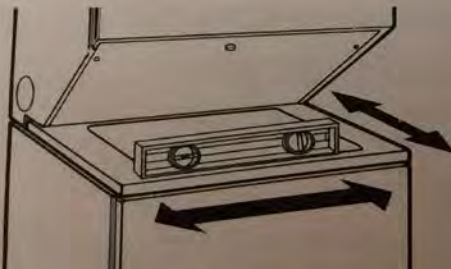

NOTE: F
compou
TEFLON

3. Tilt the washer/dryer is at least 4" (102 mm) adjusting rear feet the floor. Check as shown above. If washer/dryer movement as directed. Repeat until the

NOTE: It may be after it is moved

4. After the washer/dryer adjustable or feet tightly against the floor. If the nuts are washer/dryer

1. Remove the
2. Remove the (it will be needed)
3. Install the adjustment joint compound

Date: March 12, 2017
File #: 07 - 227865
Folder Name: 1422 PASCAL ST N
PIN: 222923310129

Determine vent length and elbows needed for best drying performance

- Use the Vent system chart below to determine type of vent material and hood combinations acceptable to use.

NOTE: Do not use vent runs longer than those specified in the Vent system chart. Exhaust systems longer than those specified will:

- Shorten the life of the dryer.
- Reduce performance, resulting in longer drying times and increased energy usage.

The Vent system chart provides venting requirements that will help to achieve the best drying performance.

Vent system chart

NOTE: Side exhaust installations add a 90° turn inside the dryer. To determine maximum exhaust length, add one 90° turn to the chart.

Number of 90° turns or elbows	Type of Vent	Box or Louvered hoods	Angled hoods
0	Rigid metal	37 ft (11.3 m)	35 ft (10.7 m)
1	Rigid metal	32 ft (9.7 m)	27 ft (8.2 m)
2	Rigid metal	24 ft (7.3 m)	19 ft (5.8 m)

Install Vent System

1. Install exhaust hood. Use caulking compound to seal exterior wall opening around exhaust hood.
2. Connect vent to exhaust hood. Vent must fit inside exhaust hood. Secure vent to exhaust hood with 4" (102 mm) clamp.
3. Run vent to dryer location. Use the straightest path possible. See "Determine vent path" in "Plan Vent System." Avoid 90° turns. Use clamps to seal all joints. Do not use duct tape, screws, or other fastening devices that extend into the interior of the vent to secure the vent, because they can catch lint.

Level Washer/Dryer

2. If the washer/dryer is not level, use a wood block and adjust the feet. Remove wood block.



3. Tilt the washer/dryer forward so the adjusting rear feet click into the floor. Check the levelness as shown above.

If washer/dryer will not level, move it as described in the manual. Repeat until the washer/dryer is level.


NOTE: It may be necessary to move the washer/dryer after it is moved into its final location.

4. After the washer/dryer is in place, adjust the adjustable or open-end wire feet tightly against the wall. If the nuts are not tight against the wall, the washer/dryer may vibrate.

Make Gas

1. Remove the red cap from the gas valve.
2. Remove the 1/2" NPT adapter (it will be necessary to use the adapter).
3. Install the adapter on the gas valve joint compound.

Date: March 12, 2017
File #: 07 - 227865
Folder Name: 1422 PASCAL ST N
PIN: 222923310129

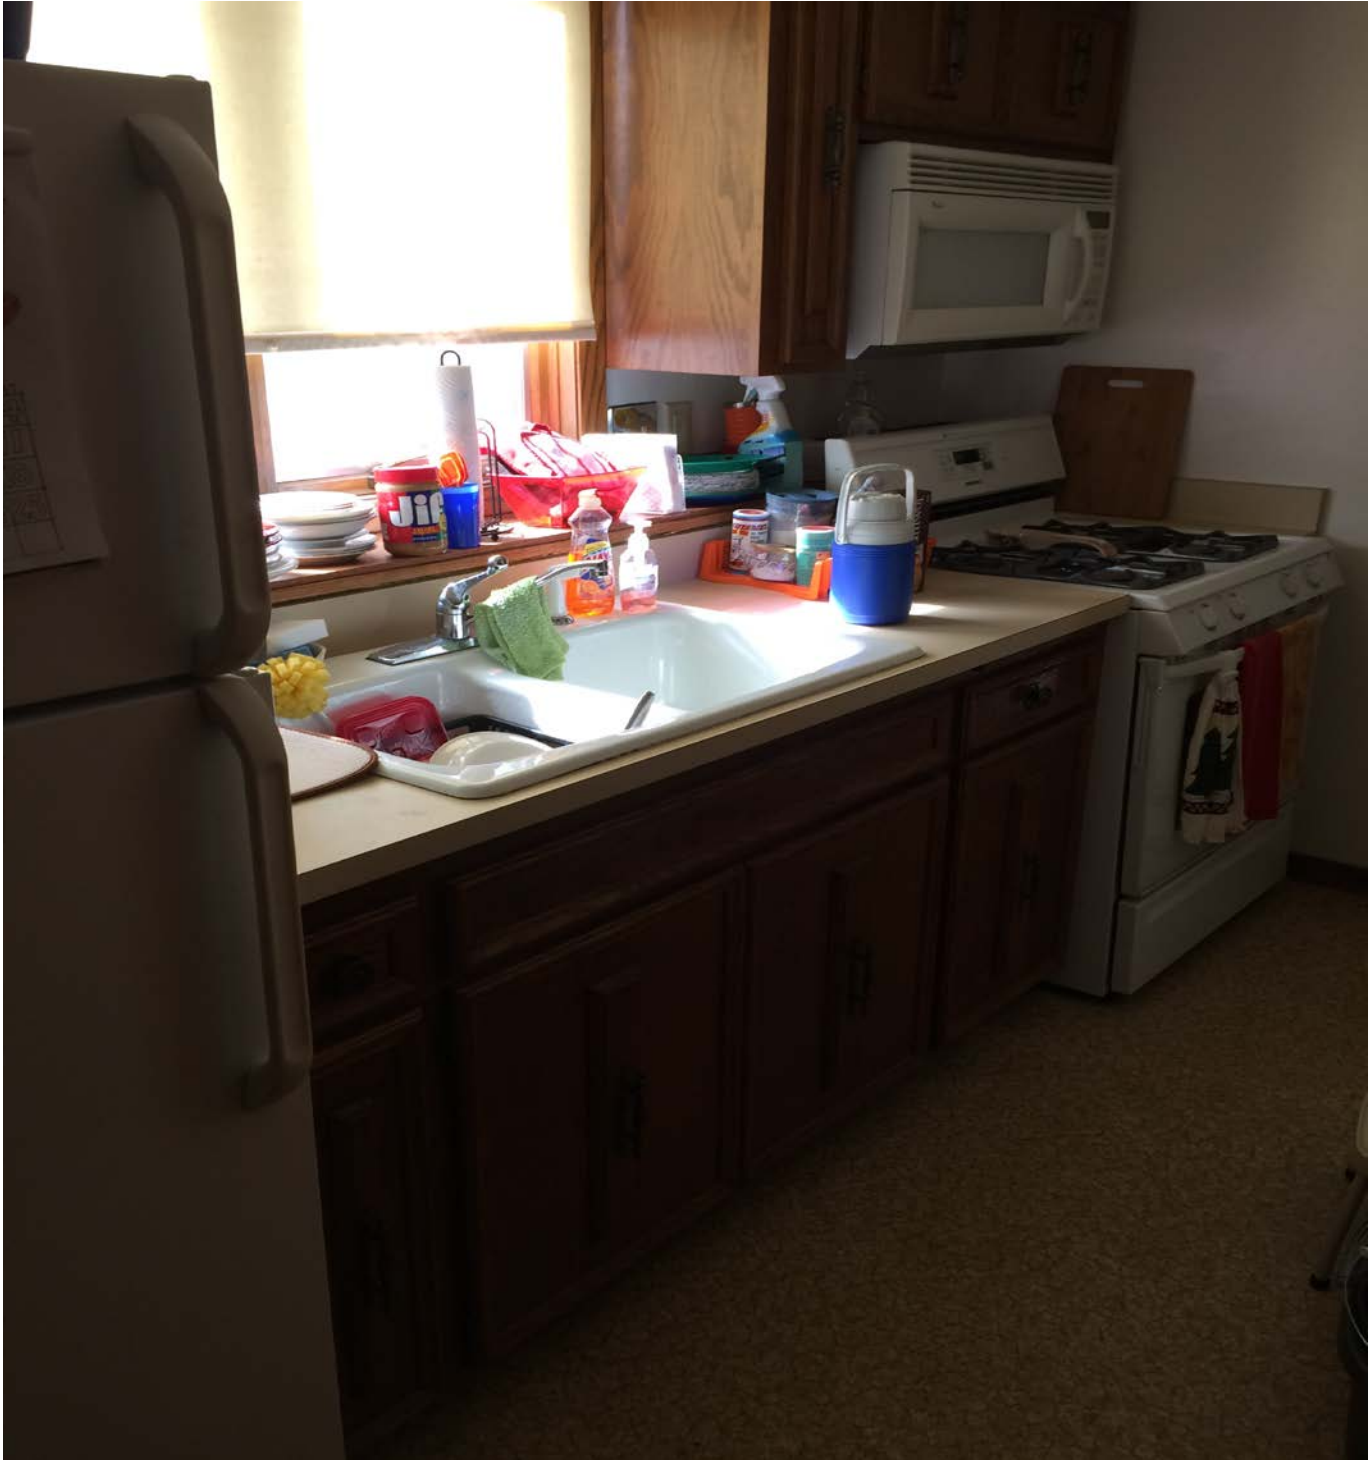

Date: March 12, 2017
File #: 07 - 227865
Folder Name: 1422 PASCAL ST N
PIN: 222923310129



Date: March 12, 2017
File #: 07 - 227865
Folder Name: 1422 PASCAL ST N
PIN: 222923310129



[illegible]

Date: March 12, 2017
File #: 07 - 227865
Folder Name: 1422 PASCAL ST N
PIN: 222923310129



Date: March 12, 2017
File #: 07 - 227865
Folder Name: 1422 PASCAL ST N
PIN: 222923310129

