


DECRA® Shingle XD®



Metal Roofing Isn't What It Used To Be®

Shingle XD® Features:

- Unique Hidden Fastener System
- “Cut & Tuck”™ Technology
No Special Tools Required
- Direct to Deck Application
- Transferable 50 -Year Limited Warranty
(including 120 mph winds and hail penetration)
- Class 4 Impact Resistance to UL 2218
by Underwriters Laboratories (Highest Rating)
- Lightweight – Only 150 lbs. per sq. installed
(sq. = 100 sq. ft.)
- Non-Combustible Class A Rated Material
- Won't Crack, Break, Burn, Curl, Split or Rot
- Walkable, Low Maintenance, Long Life
- Non-Porous, Freeze / Thaw Resistant
- Interlocking Panels Provide Protection
Against the Elements

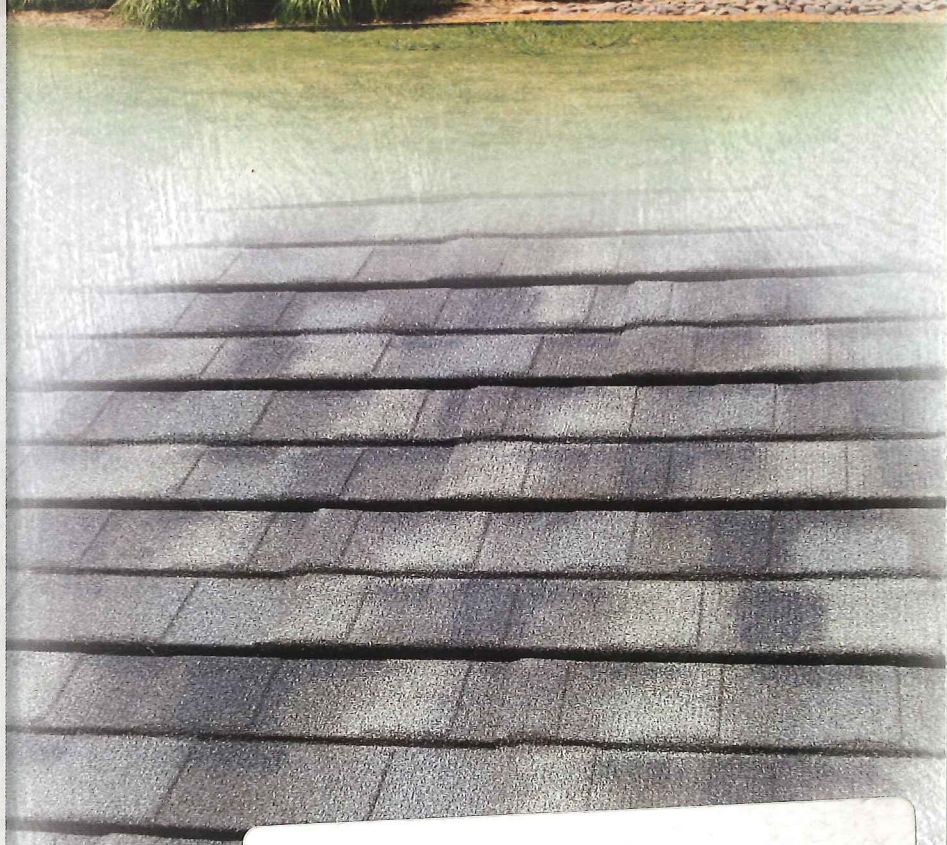


Jaeger Associates, Inc
1906 310th Street.
Titonka, Iowa 50480
www.jaegerassociatesinc.com
515-320-1635

Architectural Shingle at a Fraction of the Weight



Shingle XD® Installation Components:

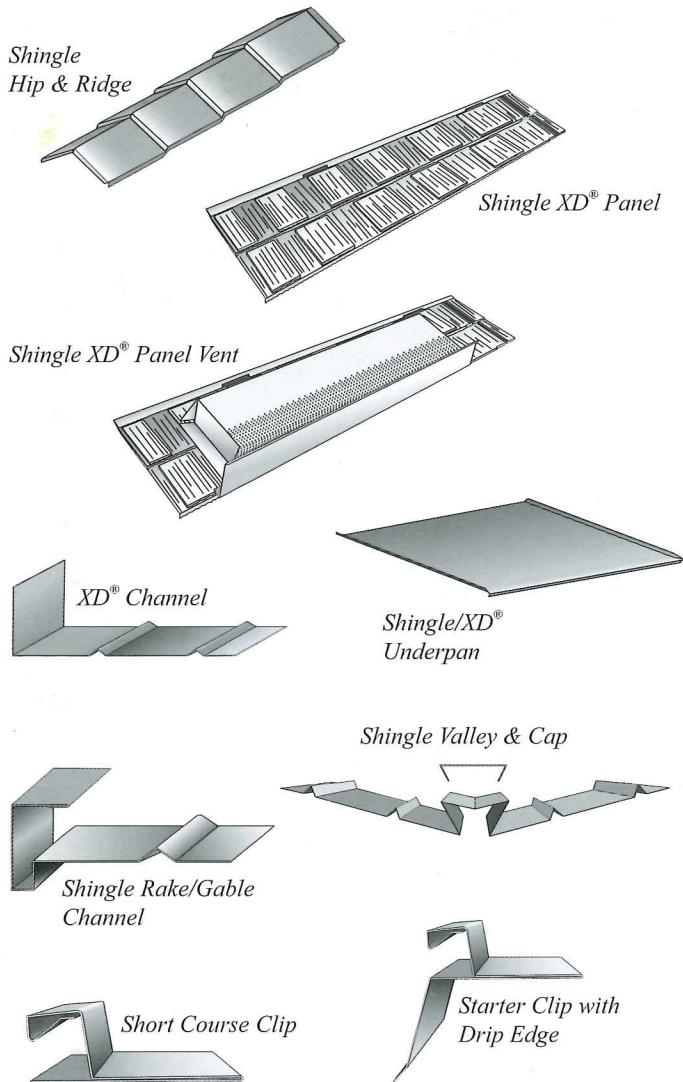

Shingle XD® Specifications:

Minimum Pitch ▶	4:12
Panel Size ▶	14-1/8" x 52-3/8"
Installed Exposure ▶	12-1/4" x 49-1/2"
Panels per Square ▶	23.8
Installed Weight ▶	150 lbs./sq.

Shingle XD® Color Blends



Classic Cobblestone



Natural Slate



Old Hickory

Due to the printing process, colors may vary from actual product. Please refer to an actual full panel product sample before ordering.



Jaeger Associates, Inc
 1906- 310th Street
 Titonka, Iowa 50480
www.jaegerassociatesinc.com
 515-320-1635

50 - Year Limited Warranty; 120 mph Wind Warranty; Highest Impact Resistance to Hail; Freeze/Thaw Resistant; Fire Safe; UL File #R14710; Florida Building Code, Miami-Dade County NOA, CCMC and ICC-ES reports available at www.decra.com.



Look for our complete line of venting and debris guard accessories, designed exclusively for use with DECRA Roofing Systems.

DECRA®
Stone Coated Steel Roofing Systems
 877.GO.DECRA [463.3272] | www.decra.com