

Date: March 12, 2017  
File #: 07 - 227865  
Folder Name: 1422 PASCAL ST N  
PIN: 222923310129



**Date:** March 12, 2017  
**File #:** 07 - 227865  
**Folder Name:** 1422 PASCAL ST N  
**PIN:** 222923310129



**Date:** March 12, 2017  
**File #:** 07 - 227865  
**Folder Name:** 1422 PASCAL ST N  
**PIN:** 222923310129



Date: March 12, 2017  
File #: 07 - 227865  
Folder Name: 1422 PASCAL ST N  
PIN: 222923310129



Date: March 12, 2017  
 File #: 07 - 227865  
 Folder Name: 1422 PASCAL ST N  
 PIN: 222923310129

- Reduce performance, resulting in longer drying times and increased energy usage.

The Vent system chart provides venting requirements that will help to achieve the best drying performance.

### Vent system chart

**NOTE:** Side exhaust installations add a 90° turn inside the dryer. To determine maximum exhaust length, add one 90° turn to the chart.

Number of 90° turns or elbows	Type of Vent	Box or Louvered hoods	Angled hoods
0	Rigid metal	37 ft (11.3 m)	35 ft (10.7 m)
1	Rigid metal	32 ft (9.7 m)	27 ft (8.2 m)
2	Rigid metal	24 ft (7.3 m)	19 ft (5.8 m)


### Install Vent System

1. Install exhaust hood. Use caulking compound to seal exterior wall opening around exhaust hood.
2. Connect vent to exhaust hood. Vent must fit inside exhaust hood. Secure vent to exhaust hood with 4" (102 mm) clamp.
3. Run vent to dryer location. Use the straightest path possible. See "Determine vent path" in "Plan Vent System." Avoid 90° turns. Use clamps to seal all joints. Do not use duct tape, screws, or other fastening devices that extend into the interior of the vent to secure the vent, because they can catch lint.

### Level Washer/Dryer

Properly leveling your washer/dryer avoids excessive noise and vibration.

1. Check the levelness of the washer/dryer by placing a level on the top edge of the washer, first side to side, then front to back.

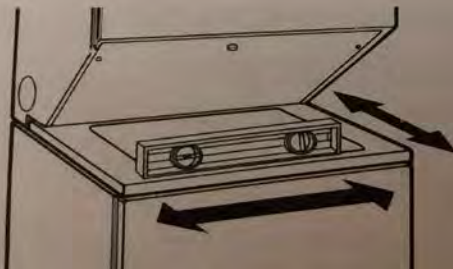

**NOTE:** F  
 compou  
 TEFLON

3. Tilt the washer/dryer is at least 4" (102 mm) adjusting rear feet the floor. Check as shown above. If washer/dryer movement as directed. Repeat until the

**NOTE:** It may be necessary to adjust the feet after it is moved.

4. After the washer/dryer is adjustable or check the feet tightly against the floor. If the nuts are loose, tighten the washer/dryer.

1. Remove the top panel.
2. Remove the screws (it will be necessary to use a screwdriver).
3. Install the adjustment joint component.

Date: March 12, 2017  
 File #: 07 - 227865  
 Folder Name: 1422 PASCAL ST N  
 PIN: 222923310129

**Determine vent length and elbows needed for best drying performance**

- Use the Vent system chart below to determine type of vent material and hood combinations acceptable to use.
- NOTE:** Do not use vent runs longer than those specified in the Vent system chart. Exhaust systems longer than those specified will:
- Shorten the life of the dryer.
  - Reduce performance, resulting in longer drying times and increased energy usage.

The Vent system chart provides venting requirements that will help to achieve the best drying performance.

**Vent system chart**

**NOTE:** Side exhaust installations add a 90° turn inside the dryer. To determine maximum exhaust length, add one 90° turn to the chart.

Number of 90° turns or elbows	Type of Vent	Box or Louvered hoods	Angled hoods
0	<b>Rigid metal</b>	37 ft (11.3 m)	35 ft (10.7 m)
1	<b>Rigid metal</b>	32 ft (9.7 m)	27 ft (8.2 m)
2	<b>Rigid metal</b>	24 ft (7.3 m)	19 ft (5.8 m)

**Install Vent System**

1. Install exhaust hood. Use caulking compound to seal exterior wall opening around exhaust hood.
2. Connect vent to exhaust hood. Vent must fit inside exhaust hood. Secure vent to exhaust hood with 4" (102 mm) clamp.
3. Run vent to dryer location. Use the straightest path possible. See "Determine vent path" in "Plan Vent System." Avoid 90° turns. Use clamps to seal all joints. Do not use duct tape, screws, or other fastening devices that extend into the interior of the vent to secure the vent, because they can catch lint.

**Level Washer/Dryer**

2. If the washer/dryer is not level, use wood block and adjust the feet. Remove wood block.



3. Tilt the washer/dryer forward until the adjusting rear feet click into place and the unit is level on the floor. Check the levelness as shown above.

If washer/dryer will not level, repeat the movement as described in the previous step. Repeat until the washer/dryer is level.


**NOTE:** It may be necessary to adjust the feet after it is moved into its final position.

4. After the washer/dryer is in its final position, adjust the adjustable or open-end leveling feet tightly against the washer/dryer. If the nuts are not tight against the feet, the washer/dryer may vibrate.

**Make Gas Connections**

1. Remove the red cap from the gas inlet.
2. Remove the 1/2" NPT adapter (it will be necessary to use the adapter).
3. Install the adapter on the gas inlet joint compound.

**Date:** March 12, 2017  
**File #:** 07 - 227865  
**Folder Name:** 1422 PASCAL ST N  
**PIN:** 222923310129

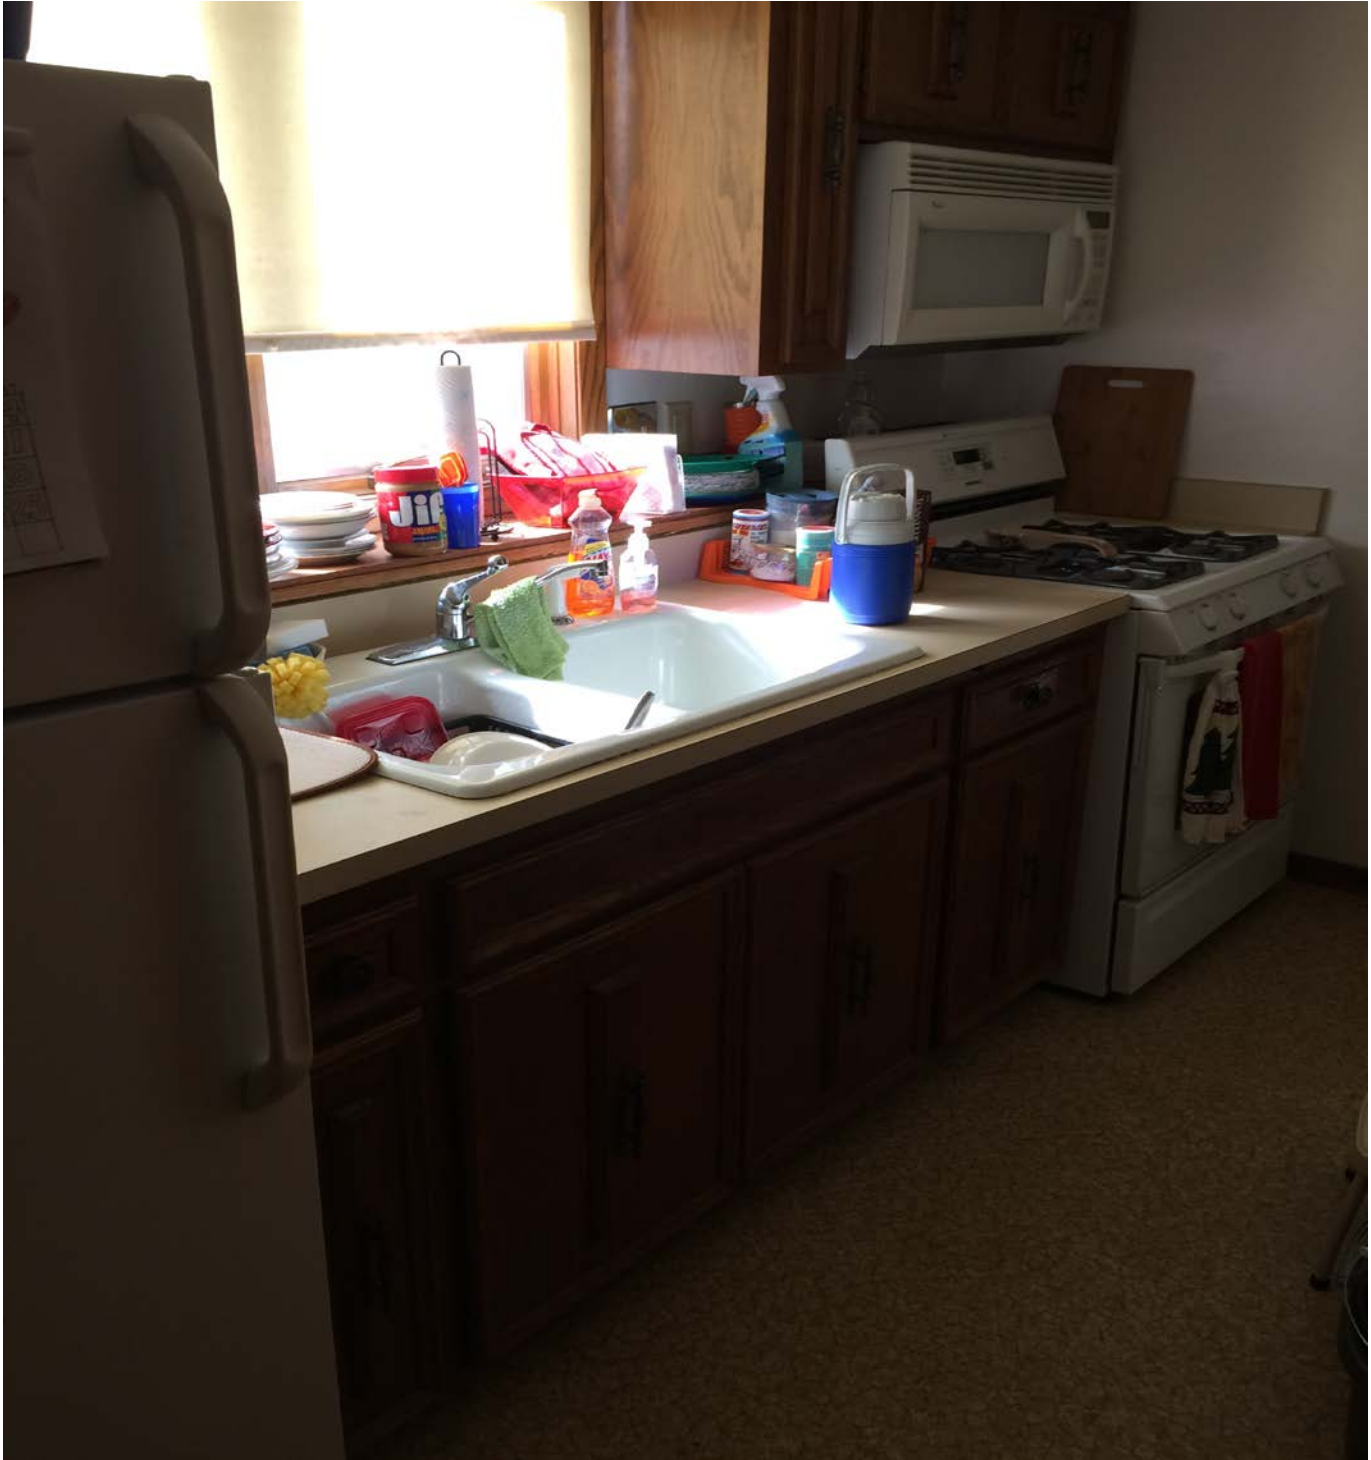

**Date:** March 12, 2017  
**File #:** 07 - 227865  
**Folder Name:** 1422 PASCAL ST N  
**PIN:** 222923310129





Date: March 12, 2017  
File #: 07 - 227865  
Folder Name: 1422 PASCAL ST N  
PIN: 222923310129





Date: March 12, 2017  
File #: 07 - 227865  
Folder Name: 1422 PASCAL ST N  
PIN: 222923310129



Date: March 12, 2017  
File #: 07 - 227865  
Folder Name: 1422 PASCAL ST N  
PIN: 222923310129

