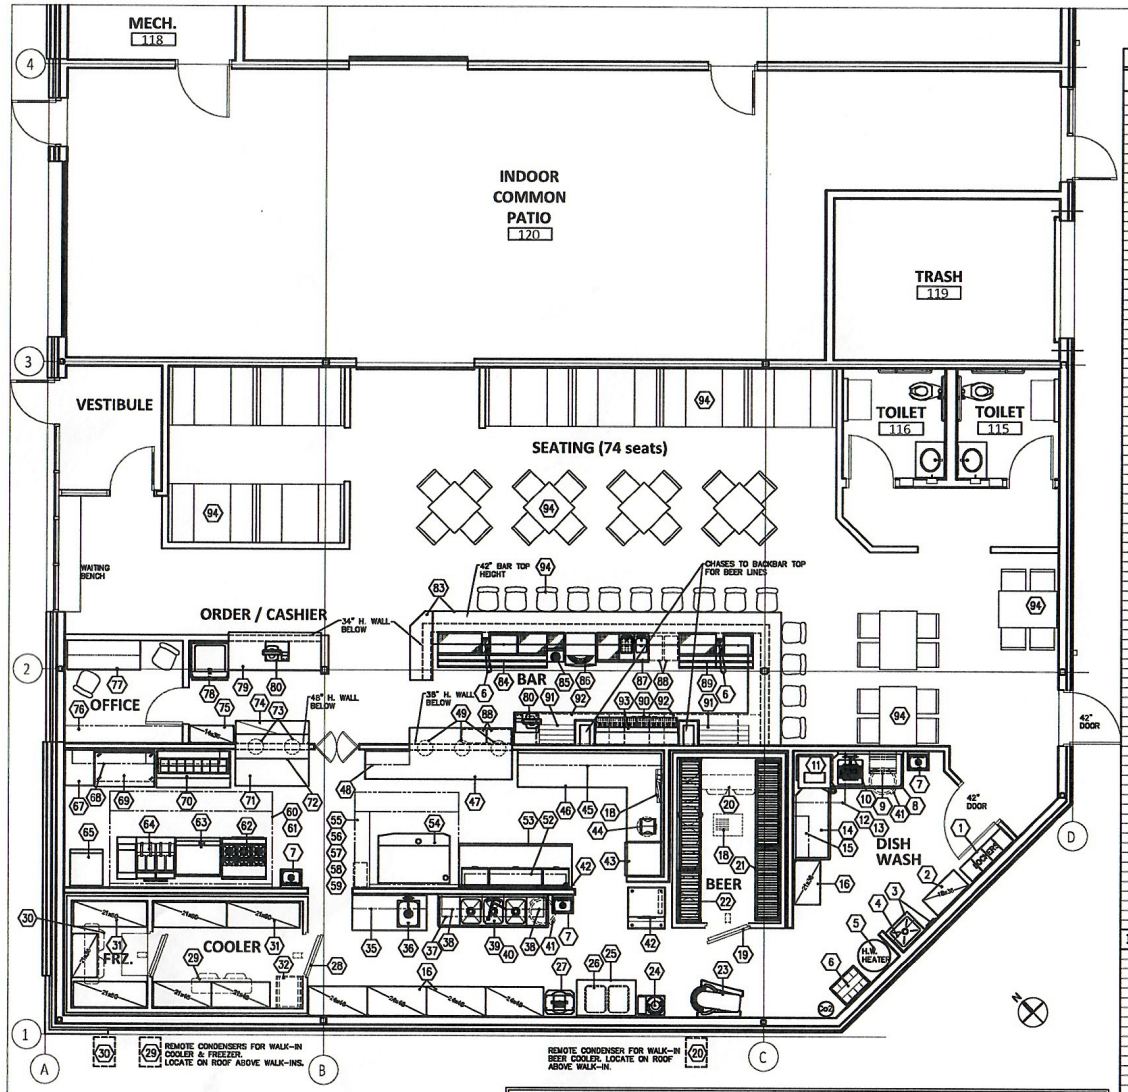


## EQUIPMENT SCHEDULE (KITCHEN)

| ITEM NO. | QTY. | DESCRIPTION | MFR. | MODEL | REMARKS |
|---|---|---|---|---|---|
| 1 | LOT | LOCKERS | BY OWNER | -- | |
| 2 | 1 | SHELVING, CHEMICAL STORAGE | ADVANCE-TABCO | EPOXY COATED | SIZE PER PLAN. 4-SHELVES & 74" POSTS EACH. |
| 3 | 1 | MOP SINK, FAUCET & MOP HOLDER | BY P.C. | -- | FLOOR MOUNT STYLE MOP SINK. |
| 4 | 1 | WALL SHELF | ADVANCE-TABCO | WS1224-16 | 12" X 24" ST. STL. SHELF W/ ST. STL. MOUNTING BRACKETS. MOUNT AT 60"-AFF. |
| 5 | 1 | HOT WATER HEATER | BY P.C. | -- | -- |
| 6 | 1 | SODA SYSTEM | SODA VENDOR | -- | BAR-N-BOX RACKS, Co2, CARBONATOR, (3) SODA GUNS AT BAR, TUBING, FITTINGS, ETC. |
| 7 | 3 | HAND SINK, WALL MOUNTED | ADVANCE-TABCO | 7-PS-56 | W/ FAUCET & SIDE SPLASHES. |
| 8 | 1 | DISHTABLE, SOILED | ADVANCE-TABCO | DTS-930-80R | 30" X 60" 14 GA. ST. STL. DISHTABLE W/ 20" X 20" X 8" SCRAP SINK & SCRAP BASKET / RACK SLIDE. |
| 9 | 1 | RACK SHELF, WALL MOUNTED | ADVANCE-TABCO | DT-5R-21 | 1-RACK CAPACITY. |
| 10 | 1 | PRE-RINSE SPRAY | T & S BRASS | B-0133-B08C | SPLASH MOUNTED. |
| 11 | 1 | DISHWASHER (CORNER STYLE) | ECOLAB | ES2000 | LOW TEMP UNIT. LEASED BY OWNER. |
| 12 | 1 | EXHAUST HOOD, CONDENSATE | CAPTIVE-AIRE | 4830WB-G | 48" X 48" X 30" H. W/ 10" DIA. DUCT (600 CFM). |
| 13 | 1 | EXHAUST FAN, CONDENSATE | BY MECH. CONTR. | -- | -- |
| 14 | 1 | DISHTABLE, CLEAN | ADVANCE-TABCO | DTC-930-80L | 30" X 60" 14 GA. ST. STL. DISHTABLE W/ UNDERSHELF. |
| 15 | 1 | WALL SHELF | ADVANCE-TABCO | WS1236-16 | 12" X 36" ST. STL. SHELF W/ ST. STL. MOUNTING BRACKETS. MOUNT AT 60"-AFF. |
| 16 | 5 | SHELVING, KITCHEN STORAGE | ADVANCE-TABCO | EPOXY COATED | SIZE PER PLAN. 5-SHELVES & 88" POSTS EACH. |
| 17 | -- | OPEN NUMBER | -- | -- | -- |
| 18 | 1 | BEER SYSTEM GLYCOL UNIT | GLASTENDER | GLC-1/3 | MOUNT CONDENSERON TOP OF WALK-IN & CONTROL PANEL ON WALL ABOVE #48. |
| 19 | 1 | WALK-IN BAR COOLER | THERMALRITE | CUSTOM | SEE NOTE #1. |
| 20 | 1 | BAR COOLER REF. SYST. (CONDEN.) | BOHN-HEATCRAFT | | SEE NOTE #2. |
| | 1 | BAR COOLER REF. SYST. (EVAPOR.) | BOHN-HEATCRAFT | | SEE NOTE #2. |
| 21 | 2 | CASE BEER SHELVES | NEW AGE | 1023TB & 1024TB | 30" X 60" X 48" & 20" X 72" x 48" H. WELDED ALUMINUM W/ 3-SHELVES. |
| 22 | 2 | KEG RACK | NEW AGE | 1280 & 31842TT2 | (10) & (4) 1/2-BARREL KEG CAPACITY. |
| 23 | 1 | MIXER, 80-QT. (PIZZA) | GLOBE | SP62P | -- |
| 24 | 1 | DOUGH ROUNDER | SOMERSET | SDR-4007 | PROVIDED W/ STAND & CASTERS. |
| 25 | 1 | WORK TABLE | ADVANCE-TABCO | TKSS-304 | 30" X 48" X 36" H. W/ 14 GA. ST. STL. TOP. BACKSPLASH & OPEN BELOW FOR INGREDIENT BINS. |
| 26 | 2 | INGREDIENT BINS | PIPER | 47-7S | (2) 150 LB. CAPACITY BINS. |
| 27 | 1 | DOUGH PRESS | SOMERSET | SIP-750 | -- |
| 28 | 1 | WALK-IN COOLER & FREEZER | THERMALRITE | CUSTOM | SEE NOTE #1. |
| 29 | 1 | COOLER REF. SYST. (CONDEN.) | BOHN-HEATCRAFT | | SEE NOTE #2. |
| | 1 | COOLER REF. SYST. (EVAPOR.) | BOHN-HEATCRAFT | | SEE NOTE #2. |
| 30 | 1 | FREEZER REF. SYST. (CONDEN.) | BOHN-HEATCRAFT | | SEE NOTE #2. |
| | 1 | FREEZER REF. SYST. (EVAPOR.) | BOHN-HEATCRAFT | | SEE NOTE #2. |
| 31 | 7 | SHELVING, COOLER & FREEZER | ADVANCE-TABCO | EPOXY COATED | SIZE PER PLAN. 4-SHELVES & 74" POSTS EACH. |
| 32 | 1 | PAN RACK | NEW AGE | 1331 | -- |
| 33 | -- | OPEN NUMBER | -- | -- | -- |
| 34 | -- | OPEN NUMBER | -- | -- | -- |
| 35 | 1 | WALL SHELF | ADVANCE-TABCO | WS1250-16 | 12" X 60" ST. STL. SHELF W/ ST. STL. MOUNTING BRACKETS. MOUNT AT 60"-AFF. |
| 36 | 1 | PREP TABLE W/ SINK & FAUCET | ADVANCE-TABCO | KMS-118-X00R | 30" X 60" X 36" H. W/ 16" X 20" X 12" DP. SINK ON RIGHT. |
| 37 | 1 | SHELVING, OVERHEAD | ADVANCE-TABCO | EPOXY COATED | (2) 12" X 42" SHELVES W/ ESU-18 & ESU-18 BRACKETS. MOUNT AT 72"-AFF. |
| 38 | 2 | WALL SHELF | ADVANCE-TABCO | WS1236-16 | 12" X 36" ST. STL. SHELVES W/ ST. STL. MTG. BRACKETS. MOUNT AT 60"-AFF. |
| 39 | 1 | 3-COMPARTMENT SINK | ADVANCE-TABCO | 94-3-54-18/L | (3) 16" X 20" X 14" DP. SINKS & (2) 18" DRAINBOARDS. (14 GA. S/S). |
| 40 | 1 | PRE-RINSE W/ ADD-ON FAUCET | T & S BRASS | B-0279 | SPLASH MOUNTED. TO INCLUDE 14" SWING SPOUT FAUCET. (3/4" INLETS). |
| 41 | LOT | WASTE RECEPTACLES (KITCHEN) | BY OWNER | -- | -- |
| 42 | 1 | ICE MAKER | SCOTSMAN | CO630MA-32 | 600 LB. CUBER. PROVIDE W/ BB8MP-1 WATER FILTER. |
| | 1 | ICE BIN | SCOTSMAN | BS305 | APPROX. 330 LB. ICE STORAGE. |
| 43 | 1 | REFRIGERATOR, 1-DOOR REACH-IN | TRUE | T-23-HC | W/ HALF-DOOR TRAY RACKS & CASTERS. |
| 44 | 1 | PIZZA PAN STAND | CHANNEL | PR-15W | W/ (15) PIZZA TRAY SLIDES. |
| 45 | 2 | WALL SHELVES | ADVANCE-TABCO | WS1250-16 | 12" X 60" ST. STL. SHELVES W/ ST. STL. MOUNTING BRACKETS. MOUNT AT 60"-AFF. |
| 46 | 1 | WORK TABLE, "L-SHAPED" | CUSTOM FAB. | ST. STL. | 30" X 120" X 72" X 30" H. W/ 14 GA. ST. STL. TOP. BACKSPLASH & 16 GA. ST. STL. UNDERSHELVES. |
| 47 | 1 | COUNTER W/ PASS-THRU TOP | CUSTOM FAB. | ST. STL. | 24" X 120" X 36" H. W/ 42" X 84" PASS-THRU (14 GA. S/S). |
| 48 | 1 | WALL SHELF | ADVANCE-TABCO | WS1236-16 | 12" X 36" ST. STL. SHELF W/ ST. STL. MTG. BRACKETS. MOUNT AT 60"-AFF. |
| 49 | 3 | HEAT LAMPS, DECORATIVE | HATCO | DLH-750-CTN | PROVIDE W/ TRACK & WALL MOUNT SWITCH. |
| 50 | -- | OPEN NUMBER | -- | -- | -- |
| 51 | -- | OPEN NUMBER | -- | -- | -- |
| 52 | 1 | WALL SHELF | ADVANCE-TABCO | WS1224-16 | 12" X 84" ST. STL. SHELF W/ ST. STL. MTG. BRACKETS. MOUNT AT 60"-AFF. |
| 53 | 1 | REFRIGERATOR, 93" PIZZA PREP | TRUE | TPP-AT-93-HC | W/ 18-PANS, 3-DOORS & CASTERS. |
| 54 | 1 | PIZZA OVEN, 3-DECK | PIZZA MASTER | PM 733 ED | ELECTRIC OVEN W/ DIGITAL DISPLAY, AUTO-TIMER & ALARM. |
| 55 | 1 | EXHAUST HOOD (PIZZA OVEN) | CAPTIVE-AIRE | | SEE NOTE #3. |
| 56 | LOT | 3" ST. STL. INSULATED PANELS | CAPTIVE-AIRE | | SEE NOTE #3. |
| 57 | 1 | EXHAUST FAN | BY MECH. CONTR. | -- | SEE NOTE #3. |
| 58 | 1 | HEATED MAKE-UP AIR UNIT | BY MECH. CONTR. | -- | SEE NOTE #3. |
| 59 | 1 | FIRE SUPPRESSION SYSTEM | CAPTIVE-AIRE | TANK FS | LOCATED IN UTILITY CONTROL CABINET ON RIGHT END OF HOOD. |
| 60 | 1 | EXHAUST HOOD (WAH COOKING) | CAPTIVE-AIRE | | SEE NOTE #3. |
| 61 | LOT | 3" ST. STL. INSULATED PANELS | CAPTIVE-AIRE | | SEE NOTE #3. |
| 62 | 1 | RANGE W/ OVEN, 6-BURNER | VULCAN | 36S-6G-N | PROVIDE W/ CASTERS & GAS QUICK DISCONNECT HOSE. (NAT. GAS). |
| 63 | 1 | 36" GRIDDLE | VULCAN | 836RS | PROVIDE W/ GRIDDLE STAND (@STAND/O-36) & GAS QUICK DISCONNECT HOSE. (NAT. GAS). |
| 64 | 2 | FRYERS W/ FRY DUMP STATION | PITCO | SSH35R/SWB | W/ BITELEFRY, DUMP STATION, CASTERS & GAS QUICK DISCONNECT HOSE. |
| 65 | 1 | FREEZER, 1-DOOR REACH-IN | TRUE | T-23F-HC | W/ CASTERS. |
| 66 | -- | OPEN NUMBER | -- | -- | -- |
| 67 | 1 | WORK TABLE | ADVANCE-TABCO | KSS-302 | 30" X 24" X 36" H. W/ 14 GA. ST. STL. TOP, BACKSPLASH & UNDERSHELF. |
| 68 | 2 | WALL SHELF | ADVANCE-TABCO | WS1250-16 | 12" X 60" ST. STL. SHELVES W/ ST. STL. MTG. BRACKETS. MOUNT AT 60"-AFF. |
| 69 | 1 | REFRIGERATOR, 48" WORKTOP | TRUE | TWT-48-4-HC | W/ (4) DRAWERS & CASTERS. |
| 70 | 1 | REFRIGERATOR, 60" SAND. PREP | TRUE | TSSU-60-16-HC | W/ 16-PANS, 2-DOORS & CASTERS. |
| 71 | 1 | WORK TABLE | ADVANCE-TABCO | KSS-305 | 30" X 60" X 36" H. W/ 14 GA. ST. STL. TOP, BACKSPLASH & UNDERSHELF. |
| 72 | 1 | SERVING SHELF, PASS-THRU | CUSTOM FAB. | ST. STL. | 30" X 60" S/S SHELF. SEMI-TO PARTIAL HEIGHT WALL BELOW. |
| 73 | 2 | HEAT LAMPS, DECORATIVE | HATCO | DLH-750-CTN | PROVIDE W/ TRACK & WALL MOUNT SWITCH. |
| 74 | 1 | SHELVING BELOW PASS-THRU | ADVANCE-TABCO | EPOXY COATED | (3) 18" X 60" SHELVES W/ (4) 34" POSTS. |
| 75 | 1 | SHELVING UNIT | ADVANCE-TABCO | EPOXY COATED | SIZE PER PLAN. 4-SHELVES & 74" POSTS EACH. |
| 76 | LOT | SHELVING, LIQUOR STORAGE | BY OWNER | -- | -- |
| 77 | LOT | OFFICE DESK, CHAIR & WALL SHELF | BY OWNER | -- | -- |
| 78 | 1 | DISPENSER, ICE-POP | BY VENDOR | VERIFY | COUNTERTOP UNIT. |
| 79 | 1 | COUNTER, ORDER-CASHIER | CUSTOM FAB | BY G.C. | P. LAM CABINET, HINGED DOORS, SHELVES W/ S/S LEGS & ADJ. FEET. |
| 80 | LOT | P.O.S. SYSTEM | BY OWNER | -- | VERIFY REQUIREMENTS W/ OWNER. (TOUCH SCREEN MONITORS, CASH DRAWERS & PRINTERS). |
| 81 | -- | OPEN NUMBER | -- | -- | -- |
| 82 | -- | OPEN NUMBER | -- | -- | -- |

## EQUIPMENT SCHEDULE (BAR & DINING AREA)

| | | | | | |
|---|---|---|---|---|---|
| 83 | 1 | BAR FIXTURE TOP & DIE WALL | CUSTOM FAB | BY G.C. | SOLID SURF. TOP, 3x8 DIE WALL W/ FRP FINISH (BARTENDER SIDE & DECORATIVE FINISH CUSTOMER SIDE). |
| 84 | 1 | OVERHEAD CLOUD & LIQ. STORAGE | CUSTOM FAB. | BY G.C. | ARCHITECT & G.C. TO COORDINATE W/ OWNER. |
| | | COCKTAIL STATION (E. TO R) | -- | -- | -- |
| | 1 | 36" UNDERBAR DRAINBOARD | GLASTENDER | DBA-36 | |
| | 1 | 6" UNDERBAR SODA CHASE | GLASTENDER | TCA-6 | |
| | 1 | 24" UNDERBAR ICE CHEST | GLASTENDER | BIA-24-CP10 | W/ COLD PLATE. |
| | 1 | 24" UNDERBAR DRAINBOARD | GLASTENDER | DBA-24 | |
| | 1 | 14" UNDERBAR BLENDER STATION | GLASTENDER | DBBA-14 | |
| | 1 | UNDERBAR DBL. SPEED RAILS | GLASTENDER | DSR-42/DSR-48 | 42" & 48" DBL. SPEED RAILS. |
| 85 | 1 | BLENDER | WARING | BB300 | -- |
| 86 | 1 | GLASSWASHER | ECOLAB | SF ROTARY | LEASED BY OWNER. |
| 87 | | GLASS WASHING STATION (L TO R) | -- | -- | -- |
| | 1 | 18" UNDERBAR DRAINBOARD | GLASTENDER | DBB-18 | |
| | 1 | 12" UNDERBAR DUMP SINK | GLASTENDER | BUS-12 | W/ FAUCET & REMOVABLE SCRAP BASKET. |
| | 1 | 12" UNDERBAR HAND SINK | GLASTENDER | HSB-12 | W/ FAUCET. |
| 88 | LOT | WASTE RECEPTACLES (BAR) | BY OWNER | -- | -- |
| 89 | | COCKTAIL STATION (E. TO R) | -- | -- | -- |
| | 1 | 30" UNDERBAR DRAINBOARD | GLASTENDER | DBA-30 | |
| | 1 | 6" UNDERBAR SODA CHASE | GLASTENDER | TCA-6 | |
| | 1 | 24" UNDERBAR ICE CHEST | GLASTENDER | BIA-24-CP10 | W/ COLD PLATE. |
| | 1 | 60" UNDERBAR DBL. SPEED RAIL | GLASTENDER | DSR-60 | |
| 90 | 1 | BACKBAR TOP & CABINET BASES | CUSTOM FAB | BY G.C. | SOLID SURF. TOP, P. LAM. CABINET BASE & S/S LEGS. G.C. TO COORDINATE W/ OWNER. |
| 91 | 2 | LIQUOR DISPLAY STEPS | CUSTOM FAB | BY G.C. | (4) P. LAM. STEPS (BLACK). |
| 92 | 1 | 72" REFRIGERATOR, BACKBAR | GLASTENDER | CFD72-L | UNFINISHED TOP, BLACK VINYL SIDES, GLASS/BLACK VINYL DOORS, 2" CASTERS & COMPRESSOR ON LEFT. |
| | 1 | 72" REFRIGERATOR, BACKBAR (KEGS) | GLASTENDER | CFD72-R | UNFINISHED TOP, BLACK VINYL SIDES, BLACK VINYL DOORS, 2" CASTERS, COMP. ON RIGHT & KEG RACK. |
| 93 | 1 | BEER TOWER, 16-TAP | MICROMATIC | 16-TAPS | 8" DIA. S/S TUBING W/ END FLANGES SECURED TO SIDE WALLS. BEER LINES FED DOWN THRU SIDE CHASES. |
| | 2 | S/S DRIP PANS | MICROMATIC | DP-SSRD-33 | (2) 5" D. X 24" L. TOP MOUNT S/S DRIP PANS W/ 1/2" DRAINS. |
| 94 | LOT | FURNITURE PACKAGE | BY OWNER | -- | BOOTHS, TABLES, CHAIRS & BAR STOOLS. |

PLAN & SCHEDULE NOTES:

1. WALK-IN BEER COOLER (7'-9" x 12'-0" x 9'-0" O.A. HEIGHT) – FLOORLESS.
   WALK-IN COOLER & FREEZER –PER PLAN (8'-0" x 16'-5" x 9'-0" O.A. HEIGHT) W/ S/S FLOOR & RAMP IN FREEZER.
   COOLER INTERIOR 7'-4" x 10'-2" & FREEZER INTERIOR 7'-4" x 5'-2".
   ACRYLUME-EMBOSSED WALLS & CEILINGS, 34" DOORS, VIEWPORT IN ALL DOORS & DIAMOND TREAD WAINSCOTE (INT./EXT.) ON ALL DOORS, LED LIGHTING & 38" H. WAINSCOTE ON EXPOSED EXTERIOR. (4) WALL TRIM STRIPS & CEILING CLOSURE PANELS.
2. COOLER & FREEZER REFRIGERATION SYSTEMS – REMOTE CONDENSERS ARE TO BE MOUNTED ON ROOF ABOVE WALK-INS. COORDINATE LOCATION W/ G.C., K.E.C. TO PROVIDE BLOCKING FOR CONDENSERS & RUN REFRIGERATION LINES TO EVAPORATOR COILS INSIDE WALK-IN. G.C. IS TO PROVIDE ROOF PENETRATION FOR REFRIGERATION LINES.
   P.C. TO PROVIDE COPPER DRAIN LINES FOR COOLERS & FREEZER EVAP. COILS AND EXTEND COIL DRAINLINES THRU WALK-IN WALL PANEL TO FUNNEL FLOOR DRAINS. DRAIN LINES MUST HAVE P-TRAP PRIOR TO EMPTYING INTO DRAIN.
   FREEZER DRAIN LINE IS WRAPPED W/ HEAT TAPE (BY E.C.). E.C. TO PROVIDE SERVICE TO REMOTE CONDENSERS ON ROOF & PROVIDE SERVICE FROM ABOVE WALK-IN FOR EVAPORATOR COIL. ROUTE THRU WALK-IN CEILINGS TO COILS.
   E.C. TO PROVIDE RECEPTACLE IN FREEZER, BEHIND COIL AT CEILING FOR DRAIN LINE HEAT TAPE PLUG-IN (120/1, 12A.).
3. EXHAUST HOODS – CONDENSATE HOOD 48" X 48" X 30" H. 10" DIA RISER, 600 CFM AT –0.030" S.P.
   PIZZA OVEN HOOD 5'-0" X 5'-0" X 30" H. W/ PERFORATED SUPPLY AIR PLENUM ALONG FRONT, UTILITY CABINET AT RIGHT & 3" ST. STL. INSULATED WALL PANELS AT REAR (6"-AFFF. TO 80"-AFF.), UTILITY CABINET IS FOR (2) HOODS, EXH. FAN, MUA CONTROLS & FIRE PROTECTION SYSTEM. THE CONTROLS ARE INCLUDED W/ EXHAUST HOOD ELECTRICAL PACKAGE.
   MAIN COOKING HOOD 4'-6" X 11'-0" X 30" H. W/ PERFORATED SUPPLY AIR PLENUM ALONG FRONT & 3" ST. STL. INSULATED WALL PANELS AT REAR (6"-AFFF. TO 80"-AFF.).
   PIZZA OVEN HOOD EXHAUST – XX" DIA. RISERS (XXXX TOTAL EXHAUST CFM).
   MAIN COOKING HOOD EXHAUST – (X) XX" DIA. RISERS (XXXX TOTAL EXHAUST CFM).
   MAKE-UP AIR – (X) XX" X XX" RISERS (XXXX TOTAL SUPPLY CFM).
   (1) EXHAUST FAN FOR (2) HOODS, MAKE-UP AIR UNIT & ALL DUCTWORK IS PROVIDED & INSTALLED BY MECH. CONTR.

**PROGRESS SET**
**4-21-25**

DRAWING SHEET INDEX

FS-1 KITCHEN–BAR EQUIPMENT PLAN & SCHEDULE
FS-2 KITCHEN–BAR EQUIPMENT PLUMBING PLAN & SCHEDULE
FS-3 KITCHEN–BAR EQUIPMENT ELECTRICAL PLAN & SCHEDULE
~~FS-4 KITCHEN–BAR EQUIPMENT HOOD SYS. PLAN~~
~~FS-5 KITCHEN–BAR EQUIPMENT 2-SINK/DISH SYS.~~
~~FS-6 KITCHEN–BAR EQUIPMENT EXHAUST~~

REVISIONS
DATE:
DATE:
DATE:
DATE:
DATE:
DATE:
DATE:

THIS DRAWING AND ALL REPRODUCTION THEREOF ARE THE PROPERTY OF R.L. MATHER AND MAY NOT BE REPRODUCED OR DISTRIBUTED IN WHOLE OR IN PART WITHOUT THE EXPRESSED WRITTEN CONSENT OF THE DESIGNER

R. L. MATHER
KITCHEN, DINING & BAR
LAY-OUT & DESIGN
(763) 572-3900
10000 CROSSROAD BLVD., PRIOR LAKE, MN
(763) 572-3900
bob@rlmather.com

TITLE
1324 W. 7TH. STREET
ST. PAUL, MN
KITCHEN – BAR EQUIPMENT PLAN & SCHEDULE

JOB NAME
1324 W. 7TH. STREET
JOB NO.
DATE
4-21-25
SCALE
1/4"=1'-0"
DESIGN DRAWN
R.L.M.
PROJECT MANAGER
SHEET
FS-1